

AISC Live Webinars

Thank you for joining our live webinar today.
We will begin shortly. Please standby.

Connection Design for Moment Frames and Braced Frames
Session 1: Moment Connections, Part 1
February 19, 2020



AISC Live Webinars

Today's live webinar will begin shortly. Please stand by.

Today's audio will be broadcast through the internet. Please be sure to turn up the volume on your speakers.

Please type any questions or comments through the chat feature in the left portion of your screen.



AISC Live Webinars

AIA Credit

AISC is a Registered Provider with The American Institute of Architects Continuing Education Systems (AIA/CES). Credit(s) earned on completion of this program will be reported to AIA/CES for AIA members. Certificates of Completion for both AIA members and non-AIA members are available upon request.

This program is registered with AIA/CES for continuing professional education. As such, it does not include content that may be deemed or construed to be an approval or endorsement by the AIA of any material of construction or any method or manner of handling, using, distributing, or dealing in any material or product.

Questions related to specific materials, methods, and services will be addressed at the conclusion of this presentation.



AISC Live Webinars

Copyright Materials

This presentation is protected by US and International Copyright laws. Reproduction, distribution, display and use of the presentation without written permission of AISC is prohibited.

© The American Institute of Steel Construction 2020

The information presented herein is based on recognized engineering principles and is for general information only. While it is believed to be accurate, this information should not be applied to any specific application without competent professional examination and verification by a licensed professional engineer. Anyone making use of this information assumes all liability arising from such use.



AISC Live Webinars

Course Description

Moment Connections, Part I
February 19, 2020

This session will address wind and low-seismic moment connection design. Common moment configurations, either with the beam flange welded directly to the column, or with flange plates connecting the beam to the column, will be presented. Local limit states for the column will be discussed and applied in a design example.



AISC Live Webinars

Learning Objectives

- Identify several types of moment connections.
- List the column-side strength limit states applicable to moment connections.
- Describe moment connections with flange plates and moment connections with beam flanges directly welded to the column.
- Describe the steps in designing a moment connection through the presentation of a design example.



Connection Design for Moment Frames and Braced Frames

Session 1: Moment Connections – Part I
February 19, 2020



Brad Davis, PhD, SE
Associate Professor, University of Kentucky
Owner, Davis Structural Engineering




MOMENT CONNECTIONS PART I




TOPICS

- Moment Connections
 - Directly Welded Flange
 - Flange-Plated (Welded)
 - Flange-Plated (Bolted)
 - Column Side Limit States
 - Design Example




9

Moment Connections

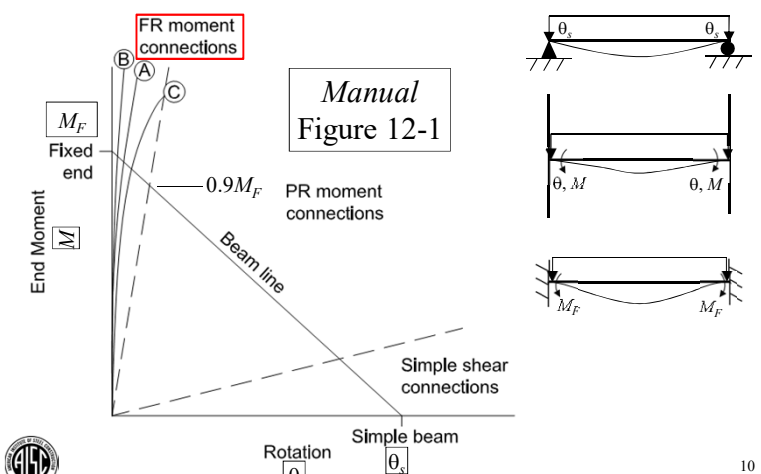


Manual
Figure 12-1



10

DIRECTLY WELDED FLANGE MOMENT CONNECTIONS

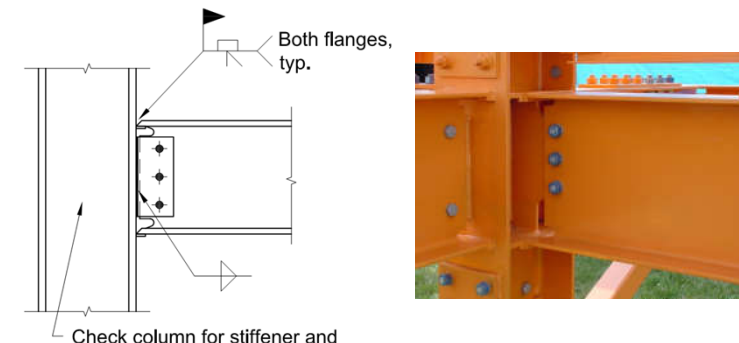


11

Directly Welded Flange Connections

Limit States

- *Manual* Page 12-7
- Girder Flange-to-Column Flange Weld
 - Complete Joint Penetration
 - Fillet Welds (Shop)
- Note
 - Weld Access Holes Required

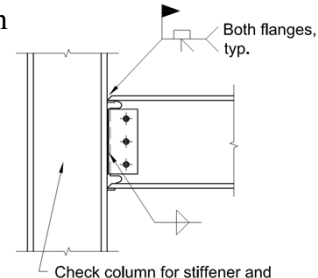

12

Directly Welded Flange Connections


- Girder Flange-to-Column Flange Weld**
 PJP joint welds are not recommended.
 Fillet welds can be designed to develop the tensile yielding strength of beam flange or resist the required beam moment (*Manual* Page 8-8):

$$\phi R_{n,Flange} \leq \phi R_{n,Weld}$$

of sixteenths

$$(0.9)(F_{yf})(t_f)(1 \text{ in.}) = (1.392)(1.5)(D_{req})(1 \text{ in.})(2) \rightarrow D_{req}$$


$$R_u \leq \phi R_n$$

$$\frac{M_u}{d - t_f} = (1.392)(1.5)(D_{req})(b_f)(2) \rightarrow D_{req} \text{ (Recommended)}$$



13

Directly Welded Flange Connections


- Web Plate Limit States**
 - Shear Transfer (minimum of bolt shear rupture, bearing, and tear-out)
 - Shear Rupture
 - Shear Yielding
 - Block Shear
 - Weld Shear Rupture

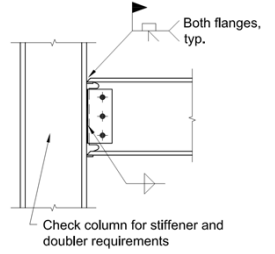

Both flanges, typ.
Check column for stiffener and doubler requirements




Vu ↓
Vu ↑




14

Directly Welded Flange Connections

- Notes**
 - Web plate connection is developed for direct shear (no eccentricity).
 - The moment is resisted by the flange force couple.
 - High seismic design requires special detailing.




Vu ↓
Vu ↑




15

FLANGE-PLATED (WELDED) MOMENT CONNECTIONS

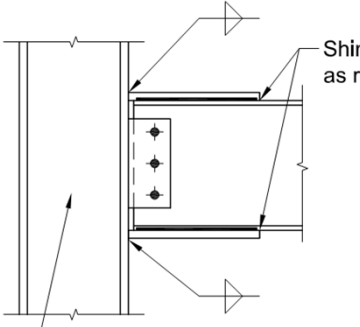

Shim top or bottom as required
Check column for stiffener and doubler requirements

Manual Page 12-4.
 Top plate is narrower than beam flange.
 Bottom plate is wider than beam flange.





16

Flange-Plated (Welded) Connections

Limit States

- Flange Plates-to-Column Flange Welds
 - Complete Joint Penetration (CJP)
 - Fillet Welds
 - Plate-to-column flange weld must be made first.

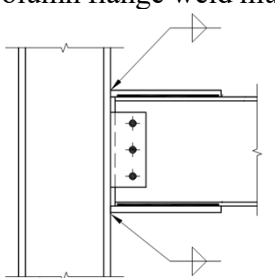17

Flange-Plated (Welded) Connections



- Tension Flange Plate Yielding

$$R_u \leq \phi R_n$$

where

$$R_u = \frac{M_u}{d + t_{p,avg}}$$

$$R_n = F_y A_g \quad (\text{Spec. Eq. J4-1})$$
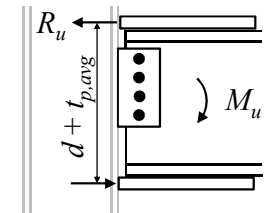
$$\phi = 0.9$$



18

Flange-Plated (Welded) Connections

- Tension Flange Plate Rupture
Longitudinal Welds Only



$$R_u \leq \phi R_n$$

where

$$\phi = 0.75$$

$$R_n = F_u A_e = F_u U A_n = F_u U A_g \quad (\text{Spec. Eq. J4-2})$$


U = Shear Lag Factor

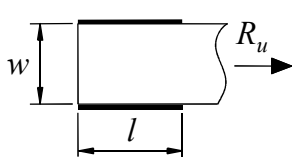



19

Flange-Plated (Welded) Connections

TABLE D3.1
Shear Lag Factors for Connections to Tension Members

	$\bar{x} = 0$
<p>4^[a] Plates, angles, channels with welds at heels, tees, and W-shapes with connected elements, where the tension load is transmitted by longitudinal welds only. See Case 2 for definition of \bar{x}.</p>	$U = \frac{3l^2}{3l^2 + w^2} \left(1 - \frac{\bar{x}}{l} \right)$ 
	$l_1 = l_2 = l$



20

Flange-Plated (Welded) Connections

- Top Flange Plate Weld
 - $R_u = \frac{M_u}{d}$
 - If Longitudinal Welds Only (*Manual* Page 8-8)
 - $\phi R_n = (1.392)(D)(l_{wl})(2 \text{ welds})$
 - If Longitudinal and Transverse Welds
 - *Specification* J2.4(b)(2)

$$R_n = \max \begin{cases} R_{nwl} + R_{nwt} \\ 0.85 R_{nwl} + 1.5 R_{nwt} \end{cases}$$

21

Flange-Plated (Welded) Connections

- Beam Top Flange Block Shear
 - Applies for beam negative moment.

$$R_u = \frac{M_u}{d}$$

ϕR_n calc (*Spec.* J4.3) for longitudinal welds only:

22

Flange-Plated (Welded) Connections

- Beam Top Flange Block Shear
 - ϕR_n calc for longitudinal or longitudinal + transverse:
Rarely Controls – short plates.

23

Flange-Plated (Welded) Connections

- Compression Flange Plate Local Buckling
 - *Specification* Table B4.1a Axial Compression

$$\frac{b_1}{t_p} \leq 0.56 \sqrt{\frac{E}{F_y}}$$

Case 1

$$\frac{b_2}{t_p} \leq 1.40 \sqrt{\frac{E}{F_y}}$$

Case 7

24

Flange-Plated (Welded) Connections

Class	Description of Element	Width-to-Thickness Ratio	Limiting Width-to-Thickness Ratio λ_c (nonslender/slender)	Examples
Unstiffened Elements	1 Flanges of rolled I-shaped sections, plates projecting from rolled I-shaped sections, outstanding legs of pairs of angles connected with continuous contact, flanges of channels, and flanges of tees	b/t	$0.56 \sqrt{\frac{E}{F_y}}$	
	2 Flanges of built-up I-shaped sections and plates or angle legs projecting from built-up I-shaped sections	b/t	$0.64 \sqrt{\frac{E}{F_y}}$ (a)	
	3 Legs of single angles, legs of double angles with			
Stiffened Elements	7 Flange cover plates and diaphragm plates between lines of fasteners or welds	b/t	$1.40 \sqrt{\frac{E}{F_y}}$	
	8 All other stiffened elements	b/t	$1.49 \sqrt{\frac{E}{F_y}}$	

- Compression Flange Plate Local Buckling

25

Flange-Plated (Welded) Connections

- Compression Plate Compression
 - Yielding or Buckling per *Specification* J4.4

$$R_u = \frac{M_u}{d + t_{p,avg}}$$

If $L_c/r \leq 25$, $\phi P_n = \phi F_y A_g$

Otherwise, $\phi P_n = \phi F_{cr} A_g$ (*Spec. Ch. E*)

$\phi = 0.9$ $L_c = KL = 0.65L$ $r = t_p / \sqrt{12}$

26

Flange-Plated (Welded) Connections

- Bottom Flange Plate Weld
 - Longitudinal only – avoid overhead welds

$$R_u = M_u / d$$

$$\phi R_n = (1.392 D l_w)(2)$$


27

Flange-Plated (Welded) Connections

- Web Plate / Web Bolts
 - No eccentricity – all moment is resisted by flange connections.

28

FLANGE-PLATED (BOLTED) MOMENT CONNECTIONS




29

Flange-Plated (Bolted) Connections

- Flange Plates
 - *Manual* Page 12-4.
 - Flange plates usually welded in shop.
 - Top flange plate is located 1/4 in. to 3/8 in. above tabulated beam depth to account for tolerances.

Manual Table 1-22




30

Flange-Plated (Bolted) Connections

Limit States

- Flange Plates-to-Column Flange Welds
 - Complete Joint Penetration (CJP)
 - Fillet Welds
 - If welded in the field, welding must be done before flange bolting.



31

Flange-Plated (Bolted) Connections

Limit States

- Tension Flange Plate Limit States

$$R_u = \frac{M_u}{d + t_p}$$

32

Flange-Plated (Bolted) Connections

1. Tensile Yielding

$\phi R_n = \phi F_y A_g$ (Spec. Eq. J4-1)
 with $\phi = 0.9$

33

Flange-Plated (Bolted) Connections

2. Tensile Rupture

$\phi R_n = \phi F_u A_e$ (Spec. Eq. J4-2)
 with $A_e = A_n$ and $\phi = 0.75$

34

Flange-Plated (Bolted) Connections

3. Flange Plate Block Shear (Spec. Eq. J4-5)

$R_n = \sum \min(\text{Bolt Shear Rupture, Bearing, Tearout})$

Spec. Eq. J3-1

Eq. J3-6a

Eq. J3-6c

35

Flange-Plated (Bolted) Connections

4. Shear Transfer Between Plate and Flange

$\phi = 0.75$

$R_n = \sum \min(\text{Bolt Shear Rupture, Bearing, Tearout})$

Spec. Eq. J3-1


Eq. J3-6a

Eq. J3-6c

36

Flange-Plated (Bolted) Connections


- Compression Plate Limit States
 - 5. Shear Transfer at Bolts
 - 6. Local and Flexural Buckling
- 5. Shear Transfer Between Plate and Flange
Same method as for Tension Plate
 - $\phi = 0.75$
 - $R_n = \sum \min(\text{Bolt Shear Rupture, Bearing, Tearout})$




37

Flange-Plated (Bolted) Connections


6. Local and Flexural Buckling

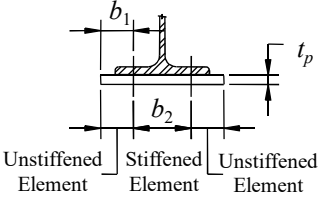

Local Buckling
(*Spec. Section B4*)

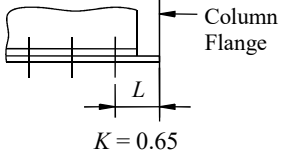


Flexural Buckling
(*Spec. Section J4.4*)



38

Flange-Plated (Bolted) Connections

- Girder/Beam Limit States
 - 7. Reduced Flexural Strength
 - 8. Block Shear





39


Flange-Plated (Bolted) Connections

7. Reduced Flexural Strength (*Specification F13.1*)

Flexural Rupture

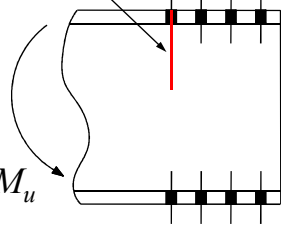





40

Flange-Plated (Bolted) Connections

7. Reduced Flexural Strength (*Spec.* F13.1)

If $F_u A_{fn} < Y_t F_y A_{fg}$

$$M_n = \frac{F_u A_{fn}}{A_{fg}} S_x \quad (\text{Spec. Eq. F13-1})$$

If $F_u A_{fn} \geq Y_t F_y A_{fg}$ flexural rupture does not apply.

where $Y_t = 1.0$ for $F_y/F_u \leq 0.8$ (A992: $50/65 = 0.769$)
= 1.1 otherwise

A_{fn} = net area of flange



A_{fg} = gross area of flange



41

Flange-Plated (Bolted) Connections

8. Beam Flange Block Shear




42

Flange-Plated (Bolted) Connections

8. Beam Flange Block Shear


Flange / Web Pattern



43


Flange-Plated (Bolted) Connections

- Web Plate / Web Bolts
Same as for Flange-Plated (Welded) / Web Bolted Connection – No Eccentricity



44

COLUMN SIDE LIMIT STATES AT MOMENT CONNECTIONS

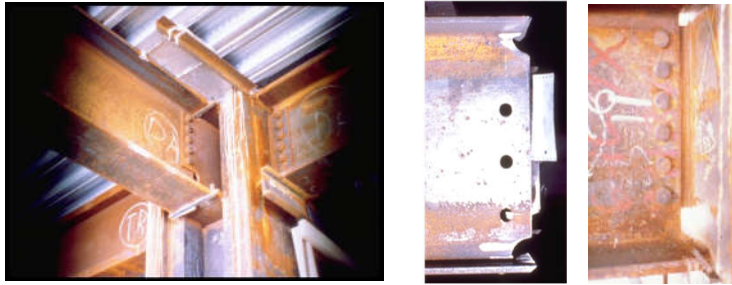

45

Column Side Limit States

Flange and Flange-Plated Connections

Specification J10 and AISC Design Guide 13


1. Flange Local Bending (*Spec. J10.1*)
2. Web Local Yielding (*Spec. J10.2*)
3. Web Local Crippling (*Spec. J10.3*)
4. Web Compression Buckling (*Spec. J10.5*)
5. Transverse Stiffener Design (*Spec. J10.8*)
6. Web Panel Zone Shear (*Spec. J10.6*)



46

Column Side Limit States

1. Flange Local Bending (*Spec. J10.1*)

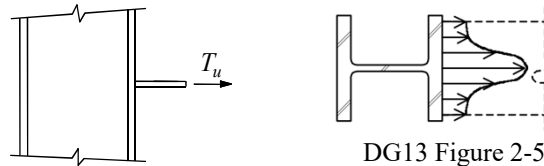

$$T_u \leq \phi R_n$$

$$\phi = 0.9$$

$$R_n = 6.25 F_y t_f^2$$


If $T_u > \phi R_n$ then half-depth web stiffeners required.



47

Column Side Limit States

2. Web Local Yielding (*Spec. J10.2*)

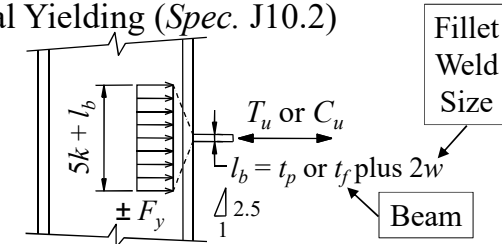

When load is away from end of member,

$$T_u \text{ or } C_u \leq \phi R_n = \phi F_{yw} t_w (5k + l_b), \text{ where } \phi = 1.0$$


If $T_u \text{ or } C_u > \phi R_n$ then half-depth stiffeners or doubler plate(s) required.



48

Column Side Limit States

3. Web Local Crippling (*Spec. J10.3*)
Same design rules as for beam bearing with $l_b = t_p$ or beam t_f plus $2w$ if applicable

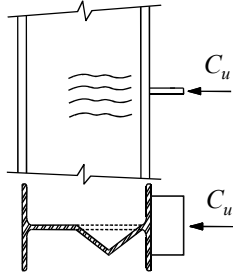


If $C_u > \phi R_n$, then 3/4-depth web stiffeners or doubler plate(s) required.

49

Column Side Limit States

3. Web Local Crippling (*Spec. J10.3*)
When load is away from end of column:

$\phi = 0.75$




$$R_n = 0.8t_w^2 \left[1 + 3 \left(\frac{l_b}{d} \right) \left(\frac{t_w}{t_f} \right)^{1.5} \right] \sqrt{\frac{EF_{yw}t_f}{t_w}} Q_f$$

$Q_f = 1.0$ for wide flange sections

50

Column Side Limit States

4. Web Compression Buckling (*Spec. J10.5*)
 $C_u \leq \phi R_n \quad \phi = 0.9$
When load is away from end of member,

$$R_n = \frac{24t_w^3 \sqrt{EF_{yw}}}{h} Q_f$$


$h =$ clear distance between fillets
 $Q_f = 1.0$ for wide flange sections


If $\max C_u > \phi R_n$ then full depth stiffeners or doubler plate(s) required.

51

Column Side Limit States

1-4. Connections at Top of Column

Column side strengths are approximately one-half of above. See *Specification* Sections J10.1, J10.2, J10.3, and J10.5.

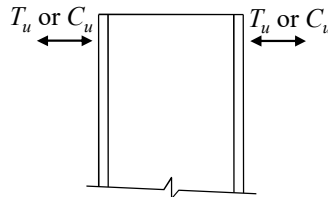

52



Column Side Limit States

5. Transverse Stiffener Design
(Spec. J10.8 Requirements)

53

Column Side Limit States

5. Transverse Stiffener Design

$$b_s + \frac{t_w}{2} \geq \frac{b_f \text{ or } b_p}{3}$$

$$t_s \geq \frac{t_f \text{ or } t_p}{2}$$

$$\frac{b_s}{t_s} \leq 0.56 \sqrt{\frac{E}{F_y}}$$

$$t_s \geq \frac{b_s}{16}$$

Local Buckling Limit State
(Compression only)

54

Column Side Limit States

5. Transverse Stiffener Design
Force Distribution Design Model (Spec. J10.8 and DG13):

Column resists ϕR_n for each limit state.

Stiffeners resist the load above ϕR_n .

Stiffener Force = $T_{u,net}$ or $C_{u,net}$
 $= (T_u \text{ or } C_u) - \min \phi R_n$
 $= R_u - \min \phi R_n$

55

Column Side Limit States

5. Transverse Stiffener Design
Required Net Stiffener Area (DG13)

$$T_{u,net} \text{ or } C_{u,net} \leq \phi R_n$$

$$T_{u,net} \text{ or } C_{u,net} = \phi F_y A_{st,req} \implies A_{st,req}$$

56

Column Side Limit States

5. Transverse Stiffener Design
Stiffener-to-Flange Weld

Recommend that weld develop the stiffener contact area (tensile yielding) at the column flange. For fillet welds:

$$\phi R_{n,st} \leq \phi R_{n,weld}$$

$$\phi F_y (b_s - clip)(t_s) = (1.392)(1.5)(D_{req})(b_s - clip)(2 \text{ welds})$$


$$D_{req} = \frac{(0.9)(F_y)(t_s)}{(1.392)(1.5)(2)} = 0.216 F_y t_s$$

If necessary: Complete Joint Penetration (CJP) Weld

57

Column Side Limit States

5. Transverse Stiffener Design
Stiffener-to-Web Weld (*Spec. J10.8*)

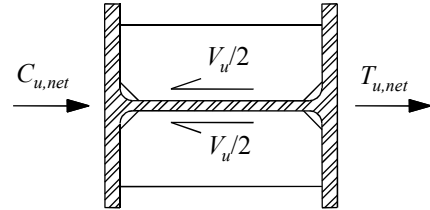

$V_u = C_{u,net} + T_{u,net}$


58

Column Side Limit States

5. Transverse Stiffener Design
Specification J10.8

When full-depth stiffeners are required.

Design as a compression member with cruciform cross section (height of web is $25t_w$ when away from the top of the column).

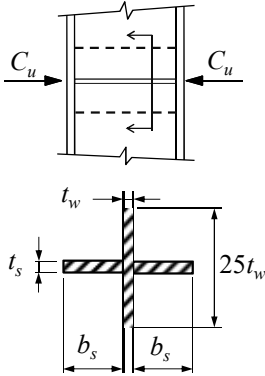

Section

59

Column Side Limit States


5. Transverse Stiffener Design

$$\max C_u \leq \phi R_n$$

R_n in compression per *Spec. J4.4*, with:

A and r for cruciform shape.

$$L_c = KL = 0.75h \text{ (Spec. J10.8)}$$
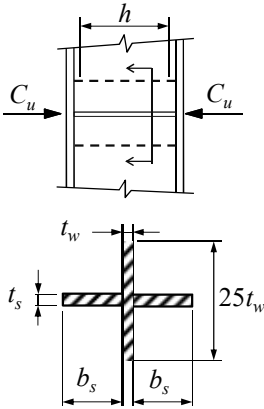
$$L_c/r \rightarrow \phi R_n$$


Section

60



Column Side Limit States

6. Web Panel-Zone Shear
(Spec. J10.6)

R_u
 P_u
 Story shear, V_u
 M_{u2} d_{m2} A A d_{m1} M_{u1}
 Panel Zones
 d_c V_u

61

Column Side Limit States

6. Web Panel-Zone Shear
At Section A-A

$R_u \leq \phi R_n$
 where
 $\phi = 0.9$
 $R_u = \frac{M_{u1}}{d_{m1}} + \frac{M_{u2}}{d_{m2}} - V_u$
 $d_{m1} = d_1 - t_{f1}$
 $d_{m2} = d_2 - t_{f2}$ (Directly Welded Flanges)

62

Column Side Limit States

6. Web Panel-Zone Shear

When effect of panel zone deformation on frame stability is not considered (*Specification* Section J10.6(a)):

For $\alpha P_r \leq 0.4P_y = 0.4F_y A_g$
 $R_n = 0.60F_y d_c t_w$

For $\alpha P_r > 0.4P_y = 0.4F_y A_g$
 $R_n = 0.60F_y d_c t_w (1.4 - \alpha P_r / P_y)$
 where $\alpha P_r = P_u$ for LRFD

63

Column Side Limit States

6. Web Panel-Zone Shear

See *Specification* Section J10.6(b) for strength when the effect of panel zone deformation on frame stability is considered in the structural analysis.

64



Column Side Limit States

6. Web Panel-Zone Shear
Doubler Plate Design
Spec. Section J10.9

If $R_u > \phi R_n$ then a doubler plate is required.

$$V_{u,dp} = R_u - \phi R_{n,col}$$

Note: Two plates are recommended if required doubler thickness exceeds 1 in.

65

Column Side Limit States

6. Web Panel-Zone Shear
Doubler Plate Shear Yielding or Buckling
Spec. J10.9 → Ch. G; Use Spec. G2.1(b)

$$V_{u,dp} \leq \phi V_n \quad \phi = 0.9$$

$$V_n = 0.6 F_{yp} t_p d_c C_{v1}$$

If $\frac{h_p}{t_p} \leq 1.10 \sqrt{\frac{k_v E}{F_{yp}}}$, $C_{v1} = 1.0$

If $\frac{h_p}{t_p} > 1.10 \sqrt{\frac{k_v E}{F_{yp}}}$, $C_{v1} = \frac{1.10 \sqrt{\frac{k_v E}{F_{yp}}}}{h_p / t_p}$

66

Example: Design Directly Welded Flange Moment Connection

3/4 in. Gr. A325-N Bolts
E70XX

67

Example: Directly Welded Flange Connection

	W24x103	W14x159
d	24.5 in.	15.0 in.
t_w	0.550 in.	0.745 in.
b_f	9.00 in.	15.6 in.
t_f	0.980 in.	1.19 in.
k		1.79 / 2-1/2 in.
h/t_w		15.3
A		46.7 in. ²
T		10 in.

68

Example: Directly Welded Flange Connection

W24x103 Flange-to-Column Flange Weld

CJP welds with backing bars.

W24x103 Web-to-Column Connection

Single Plate
No eccentricity considered.

69

Example: Directly Welded Flange Connection

W24x103 Web-to-Column Flange Connection

Try PL 5/16 x 3 1/2 x 1'-2 1/2" A36 with
5 - 3/4 in. Gr. A325-N Bolts

70

Example: Directly Welded Flange Connection

W24x103 Web-to-Column Flange Connection

$V_u = 75$ kips

Limit State Strengths

Shear Yielding:	$\phi V_n = 97.9$ kips	<u>OK</u>
Shear Rupture:	$\phi V_n = 82.6$ kips	<u>OK</u>
Block Shear:	$\phi V_n = 81.5$ kips	<u>OK</u>
Shear Transfer:	$\phi V_n = 85.4$ kips	<u>OK</u>
Weld Rupture:	$\phi V_n = 202$ kips	<u>OK</u>

71

Example: Directly Welded Flange Connection

Beam Flange Forces

W24x103 $d = 24.5$ in. $t_f = 0.980$ in.

$M_u = 882$ kip-ft

T_u or $C_u = (882 \times 12) / (24.5 - 0.980)$
 $= 450$ kips

72

Example: Directly Welded Flange Connection

Beam Flange Forces

$V_u = 90$ kips

$T_u = 450$ kips

$C_u = 450$ kips

23.5 in.

23.5 in.

1 2 3 4

73

Example: Directly Welded Flange Connection

Column Flange Local Bending (Spec. J10.1)

$$\phi R_n = \phi(6.25F_{yw}t_f^2)$$

$$= 0.9(6.25)(50)(1.19^2)$$

$$= 398 \text{ kips} < T_u = 450 \text{ kips}$$

For this loading, half-depth stiffeners required at tension locations 1 and 3.

T_u

C_u

23.5 in.

23.5 in.

1 2 3 4

74

Example: Directly Welded Flange Connection

Column Web Local Yielding (Spec. J10.2)

$$\phi R_n = \phi F_{yw}t_w(5k + t_{fb})$$

$$= (1.0)(50)(0.745)[(5)(1.79) + 0.980]$$

$$= 370 \text{ kips} < T_u \text{ and } C_u = 450 \text{ kips}$$

Half-Depth Stiffeners Required at all locations.

Use Full-Depth Stiffeners Top and Bottom.

T_u

C_u

23.5 in.

23.5 in.

1 2 3 4

75

Example: Directly Welded Flange Connection

Column Web Local Crippling (Spec. J10.3)

With $l_b = t_f = 0.980$ in.,

$$\phi R_n = \phi 0.8t_w^2 \left[1 + 3 \left(\frac{l_b}{d} \right) \left(\frac{t_w}{t_f} \right)^{1.5} \right] \sqrt{\frac{EF_{yw}t_f}{t_w}} Q_f$$

$$= 556 \text{ kips}$$

$C_u = 450 \text{ kips} < \phi R_n = 556 \text{ kips}$ OK

T_u

C_u

23.5 in.

23.5 in.

1 2 3 4

76




Example: Directly Welded Flange Connection


Transverse Stiffener 1-2 Design

$$T_{u1} = 450 \text{ kips} - \min \begin{cases} 398 \text{ kips (FLB)} \\ 370 \text{ kips (WLY)} \end{cases}$$

$$= 450 \text{ kips} - 370 \text{ kips} = 80.0 \text{ kips}$$

$$C_{u2} = 450 \text{ kips} - 370 \text{ kips} = 80.0 \text{ kips}$$



Web Weld $V_u = 80.0 + 80.0 = 160 \text{ kips}$



77

Example: Directly Welded Flange Connection

Transverse Stiffener 1-2 Design




Same on Tension and Compression Sides

$$80.0 \text{ kips} = (0.9)(36)(A_{st,req}) \rightarrow A_{st,req} = 2.46 \text{ in.}^2$$

Try PL 1/2 x 6

Clip: W14x159 $k_{det} - t_f = 2 - 1/2 - 1.19 = 1.31 \text{ in.}$

Use 1-1/2 in. clip

$$A_{st} = 2(6 - 1 - 1/2)(1/2) = 4.50 \text{ in.}^2 \geq A_{st,req} \quad \text{OK}$$


78

Example: Directly Welded Flange Connection

Transverse Stiffener 1-2 Design

Minimum Thickness

$$t_s = 0.50 \text{ in.} \geq t_{fb} / 2 = 0.980 / 2 = 0.490 \text{ in.} \quad \text{OK}$$

Minimum Width


$$b_s + t_w / 2 \geq b_f / 3$$

$$6 + 0.745 / 2 = 6.37 \text{ in.} > 9.00 / 3 = 3 \text{ in.} \quad \text{OK}$$

Local Buckling

$$\frac{b_s}{t_s} = \frac{6}{1/2} = 12 < 0.56 \sqrt{\frac{E}{F_y}} = 0.56 \sqrt{\frac{29000}{36}} = 15.9, \text{ OK}$$

Use 2 PL 1/2 x 6, A36, Top and Bottom



79

Example: Directly Welded Flange Connection

Transverse Stiffener 1-2 Design

Stiffener-to-Column Flange Fillet Welds to Develop Plate Yield Strength at Weld

$$\phi R_{n,st} \leq \phi R_{n,weld}$$


$$D_{req} = 0.216 F_y t_s$$

$$= 0.216(36)(1/2)$$

$$= 3.89 \text{ sixteenths}$$

Minimum Weld Size = 1/4 in.

Use 1/4 in. double-sided fillet welds.



80

Example: Directly Welded Flange Connection

Transverse Stiffener 1-2 Design

Stiffener-to-Column Web Welds

$T = 10.0 \text{ in.} > d_c - 2t_{fc} - 2clip = 15.0 - 2(1.19) - 2(1.5) = 9.62 \text{ in.}$ Use 9-1/2 in.

$80 \text{ kips} = (1.392)(D_{req})(9.5 \text{ in.})(2 \text{ welds})$
 $D_{req} = 3.02 \text{ sixteenths}$
 Minimum weld 1/4 in. Use 1/4 D.S. Welds

81

Example: Directly Welded Flange Connection

Transverse Stiffener 1-2 Design

Base Metal Strength of Column Web

$\phi V_n = \phi(0.6F_u)(t_w L_w)$
 $= (0.75)(0.6)(65)(0.745)(9.5)(2 \text{ shear planes})$
 $= 414 \text{ kips} > (2)(80.0) = 160 \text{ kips}$ OK

82

Example: Directly Welded Flange Connection

Partial Design

83

Example: Directly Welded Flange Connection

Panel-Zone Shear Strength


84

Example: Directly Welded Flange Connection

Panel-Zone Shear Strength

$$V_u = 450 + 450 - 90.0 = 810 \text{ kips}$$

$$\alpha P_r = (1,200 + 1,335) / 2 = 1,270 \text{ kips}$$
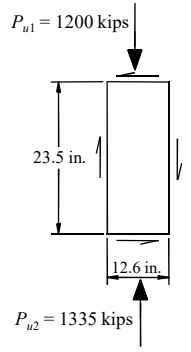
$$0.4 P_y = 0.4 F_y A_g = (0.4)(50)(46.7) = (0.4)(2335) = 934 \text{ kips} < 1,270 \text{ kips}$$


85

Example: Directly Welded Flange Connection

Panel-Zone Shear Strength

Shear Strength of Column Web

Since $\alpha P_r > 0.4 P_y = 934 \text{ kips}$

$$\phi V_n = \phi 0.6 F_y d_c t_w (1.4 - \alpha P_r / P_y) = 0.9(0.6)(50)(15.0)(0.745)(1.4 - 1270 / 2335) = 259 \text{ kips} < V_u = 810 \text{ kips}$$

Doubler Plate(s) Required

Doubler Plate (assume yielding controls)

Large Required Strength → Try Gr. 50 plate.

$$\phi V_n = \phi 0.6 F_y d_c t_p = (0.9)(0.6)(50)(15.0)(t_{p,req}) = 810 \text{ kips} - 259 \text{ kips}$$

$$t_{p,req} = 1.36 \text{ in.}$$

86

Example: Directly Welded Flange Connection

Panel-Zone Shear Strength

Try two 3/4 in. Web Doubler Plates


$$h_p = d_c - 2t_f = 15.0 - (2)(1.19) = 12.6 \text{ in.}$$

Doubler Plate Slenderness:

$$\frac{h_p}{t_p} = \frac{12.6}{3/4} = 16.8 \leq 1.10 \sqrt{\frac{k_v E}{F_y}} = 61.2$$

Shear yielding controls as assumed.

Use 2 – 3/4 in. Gr. 50 Doubler Plates

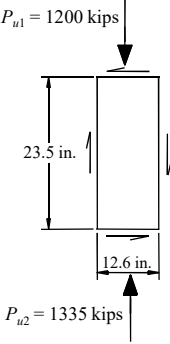

87

Example: Directly Welded Flange Connection

Panel-Zone Welds

Long Side, Vertical Welds


Try fillet welds to develop the required doubler plate thickness (DG13 Eq. 4.4-7 approach).

$$\phi 0.6 F_y t_{p,req} (1 \text{ in.}) = 1.392 (D_{req}) (1 \text{ in.})$$

$$(0.9)(0.6)(50)(1.36 \text{ in.} / 2) = 1.392 D_{req}$$

$$D_{req} = 13.2 \text{ sixteenths}$$

Large, so use Doubler Plate Weld per AWS D1.8, Clause 4.3 (Develops the Doubler Plate)



DG13 Figure 4-13(b)

88

Example: Directly Welded Flange Connection

Panel Zone Welds
 Short Side, Horizontal Welds
 Use DG13 Figure 4-12(d).

Weld transfers half of the stiffener force directly to doubler

More information on doubler plate welding:
 DG13
 AISC 341-16 Commentary Section E3.3
 DG21 Section 4.3.3

89

Example: Directly Welded Flange Connection

Final Design

90

End of Session 1
 Thank You for
 Attending

Next Up

91

Next Session

- February 26, 2020 Moment Connections Part II

TOPICS

- Tee Stub Moment Connections
- End-Plate Moment Connections

92

AISC | Questions?



**Smarter.
Stronger.
Steel.**

Single-Session Registrants

CEU / PDH Certificates

- You will receive an email on how to report attendance from: registration@aisc.org.
- Be on the lookout: Check your spam filter! Check your junk folder!
- Completely fill out online form. Don't forget to check the boxes next to each attendee's name!




**Smarter.
Stronger.
Steel.**

Single-Session Registrants

CEU / PDH Certificates

- Reporting site (URL will be provided in the forthcoming email).
- Username: Same as AISC website username.
- Password: Same as AISC website password.




**Smarter.
Stronger.
Steel.**

4-Session Registrants

CEU / PDH Certificates

One certificate will be issued at the conclusion of the course.



**Smarter.
Stronger.
Steel.**



4-Session Registrants

Attendance and PDH Certificates

- You have two options to receive credit for a given session.
 - Option 1: Watch the live session. Credit for live attendance will be displayed on the Course Resources table within two days of the session.
 - Option 2: Watch the recording and pass the associated quiz.

Videos and Quizzes

- For each session, find access by the end of the day, Friday, after the live air date. (An email will be sent from webinars@aisc.org.)
- Quiz scores are displayed in the Course Resources table.

Distribution of Certificates

All certificates will be issued after the course is completed. Only the registrant will receive a certificate for the course.



4-Session Registrants

Course Resources

Find all your handouts, quizzes and quiz scores, recording access, and attendance information in one place!



4-Session Registrants

Course Resources

Go to www.aisc.org and sign in.



4-Session Registrants

Course Resources

Go to www.aisc.org and sign in.

4-Session Registrants

Course Resources



AISC > MY ACCOUNT > COURSE RESOURCES

Course Resources

Event	Start Date
Session: Design of Steel	2/12/2020 12:00:00 AM
4-Session Package: Design of Facade Attachments	5/9/2019 1:00:00 PM
NS 20.8-Session Package: High School 18 - Fundamentals of Connection Design	10/12/2017 7:00:00 PM
NS 20.8-Session Package: High School 18 - Design of Facade Attachments	11/2/2018 7:00:00 PM
NS 27.8-Session Package: High School 17 - Design of Facade Attachments	7/16/2018 7:00:00 PM
NS 28.8-Session Package: High School 18 - Steel Construction: NIS To Topstory Out	10/15/2018 7:00:00 PM
NS 28.8-Session Package: High School 18 - Connection Design	2/4/2019 7:00:00 PM
NS 20.8-Session Package: High School 20 - Classical Methods of Structural Analysis	6/3/2019 7:00:00 PM
8-Session Package: Seismic Design of Steel - Concrete & Steel	7/16/2018 1:00:00 PM

4-Session Registrants

Course Resources

AISC > MY ACCOUNT > COURSE RESOURCES > DESIGN OF FACADE ATTACHMENTS PACKAGE RESOURCES

Design of Facade Attachments:

4-SESSION PACKAGE RESOURCES

Event	Date	Handouts	Video	Quiz	Attendance
FD: Facade Fundamentals	N/A	Download	Video	Pass Score: 100	N/A
1.1 Facade Attachments Part 1	May 9 2019 1:00PM EDT	Download	Available 05/11/2019 5:00PM EDT	Available 05/12/2019 3:00 PM EDT	Pending
1.2 Facade Attachments Part 2	May 16 2019 1:00PM EDT	Download	Available 05/18/2019 5:00PM EDT	Available 05/19/2019 3:00 PM EDT	Pending
1.3 Facade Attachments - Building Level Chills	May 23 2019 1:00PM EDT	Download	Available 05/25/2019 3:00PM EDT	Available 05/26/2019 3:00 PM EDT	Pending
Final Exam	N/A			Available 5/27/2019 5:00 PM EDT	



AISC | Thank you.



Smarter.
Stronger.
Steel.

