

AISC Live Webinars

Thank you for joining our live webinar today.
We will begin shortly. Please standby.

Thank you.

Need Help?

Call ReadyTalk Support: 800.843.9166

**Design Guide 30: Sound Isolation and Noise
Control in Steel Buildings**

November 13, 2018



**Smarter.
Stronger.
Steel.**

AISC Live Webinars

Today's live webinar will begin shortly. Please stand by.

As a reminder, all lines have been muted. Please type any questions or comments through the chat feature on the left portion of your screen.

Today's audio will be broadcast through the internet.
Alternatively, to hear the audio through the phone, dial:

(800)-289-0459
Passcode: 572920



**Smarter.
Stronger.
Steel.**



AISC Live Webinars

Audio Options

Today's audio will be broadcast through the internet.

Alternatively, to hear the audio through the phone, dial:

(800)-289-0459
Passcode: 572920



AISC Live Webinars

AIA Credit

AISC is a Registered Provider with The American Institute of Architects Continuing Education Systems (AIA/CES). Credit(s) earned on completion of this program will be reported to AIA/CES for AIA members. Certificates of Completion for both AIA members and non-AIA members are available upon request.

This program is registered with AIA/CES for continuing professional education. As such, it does not include content that may be deemed or construed to be an approval or endorsement by the AIA of any material of construction or any method or manner of handling, using, distributing, or dealing in any material or product.

Questions related to specific materials, methods, and services will be addressed at the conclusion of this presentation.



AISC Live Webinars

Copyright Materials

This presentation is protected by US and International Copyright laws. Reproduction, distribution, display and use of the presentation without written permission of AISC is prohibited.

© The American Institute of Steel Construction 2018

The information presented herein is based on recognized engineering principles and is for general information only. While it is believed to be accurate, this information should not be applied to any specific application without competent professional examination and verification by a licensed professional engineer. Anyone making use of this information assumes all liability arising from such use.



AISC Live Webinars

Course Description

Design Guide 30: Sound Isolation and Noise Control in Steel Buildings
November 13, 2018

Many have the perception that acoustics qualities of steel structures are not as robust as those of other major building materials. This presentation will shed light on the superior acoustical qualities of steel structures that can be achieved, as described in AISC Design Guide 30. Practical design applications will be incorporated including discussions on floor/ceiling and wall assemblies. Both engineers and architects will find this presentation immediately applicable to their projects.



AISC Live Webinars

Learning Objectives

- Select acoustical design criteria through observation of source sound levels, noise sensitivities, and adjacencies.
- Describe building code sound isolation requirements, industry guidelines and design standards that apply to practical acoustical design in steel buildings.
- Identify and prioritize paths of sound transmission.
- Explain how sound-isolating constructions in steel-framed structures achieve applicable performance criteria.



Design Guide 30: Sound Isolation and Noise Control in Steel Buildings




Benjamin Markham
Director, Architectural Acoustics
Acentech
Cambridge, MA




Introduction

- Introduction to Sound / Acoustics
- Architectural Acoustics is four things:

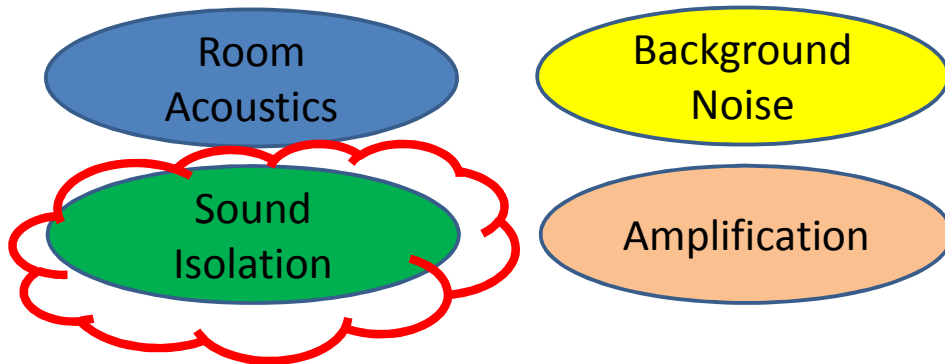

Introduction

S/N

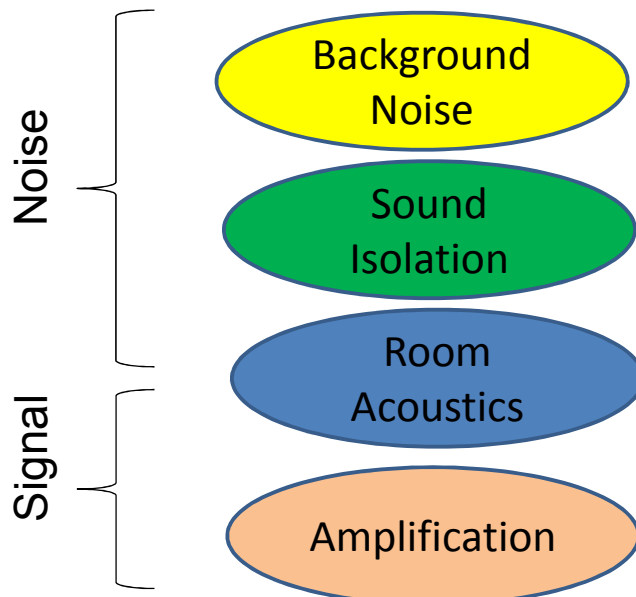

A Road Map to Good Sound Isolation Design



1. How Sensitive is your Room?
2. How Loud is the Source?
3. Codes, Standards, and Derived Criteria
4. Identify the Paths
5. Design Sound-Isolating Constructions



11

Introduction to Sound

Sound is **vibration** through an **elastic medium**.

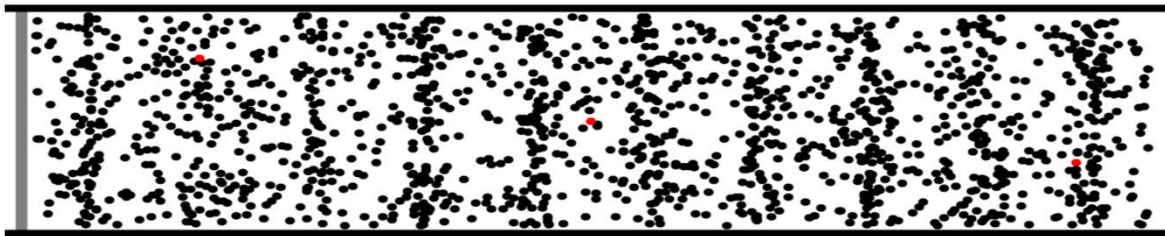

©2011. Dan Russell



12



A Few Properties of Sound

- Amplitude
- Frequency
- Propagation
- Speed
- Diffraction and other wave-behavior



13

Amplitude

- Sound pressure and sound power
- Scale is ~ 13 orders of magnitude
- Decibel (dB) is a ***log ratio***
 - Unitless
 - Manageable scale (roughly 0 to 130 dB)
 - Better matches perception (loudness)
 - “pressure level” and “power level”




14




Frequency

High Frequency
("Hissy")

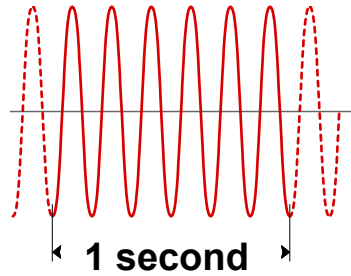


Low Frequency
("Boomy")

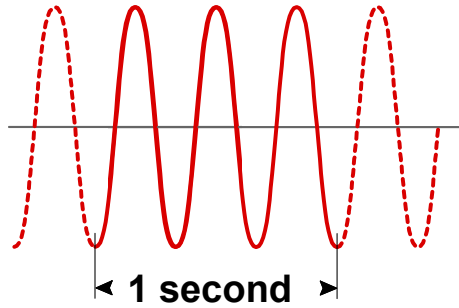

$$\text{Frequency (Hz)} = \frac{\text{cycles}}{\text{second}}$$




Normal Hearing

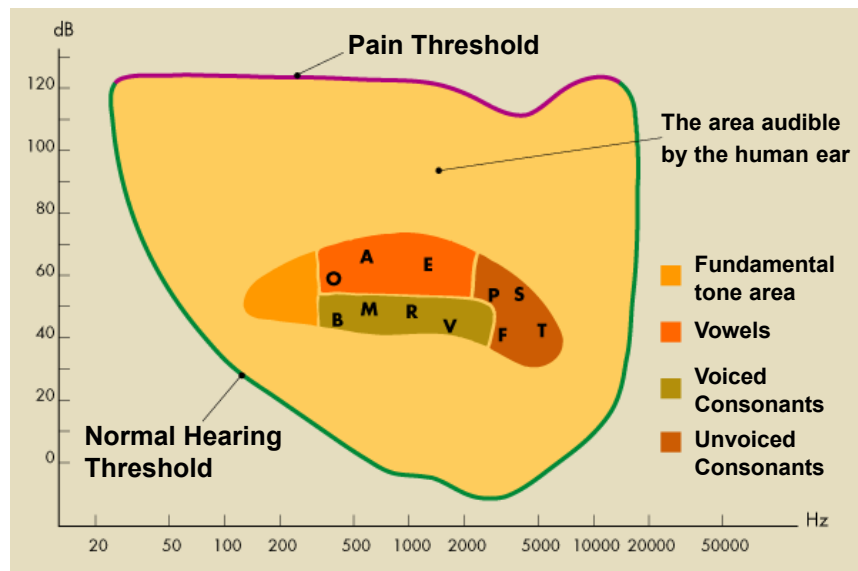

Courtesy: Ecophon




Room Acoustics

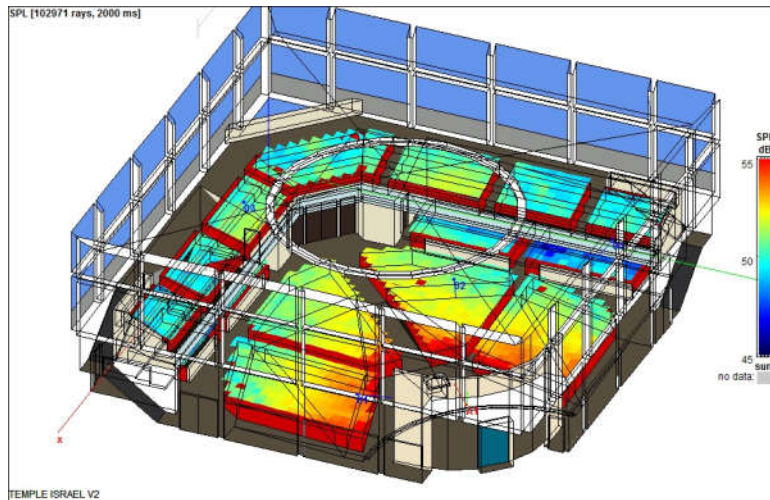

17

Wallace Clement Sabine Discovered a Formula for Reverberation Time

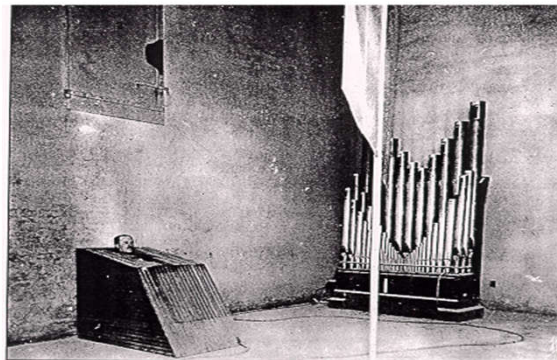

$$\text{Reverberation Time} = k * \frac{\text{Volume}}{\text{Absorption}}$$



18



Natatorium – 6 Second RT




- 6 second RT without treatment
- 1.7 second RT with an absorptive ceiling



19

What is Sound Absorption?

The ratio between energy not reflected and incident energy for a sound wave hitting a surface

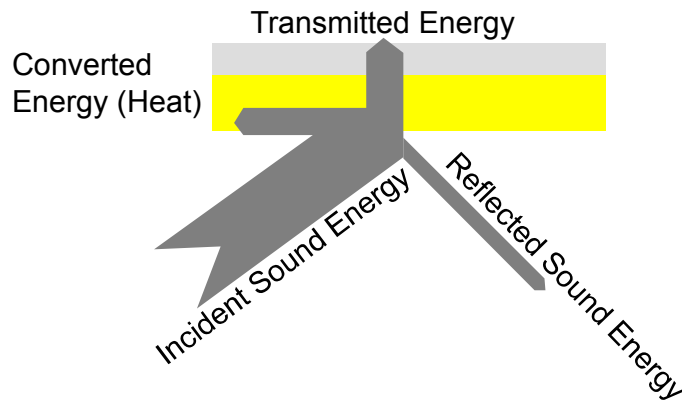

Graphic, courtesy: Ecophon



20




Coefficient of Absorption, α



Material	Coefficient of Absorption
Brick, concrete block, glass	0.05
Carpet combined pile and foam	0.30
Heavy velour	0.55
Glass wool (fiberglass)	0.95



Absorption Versus Frequency

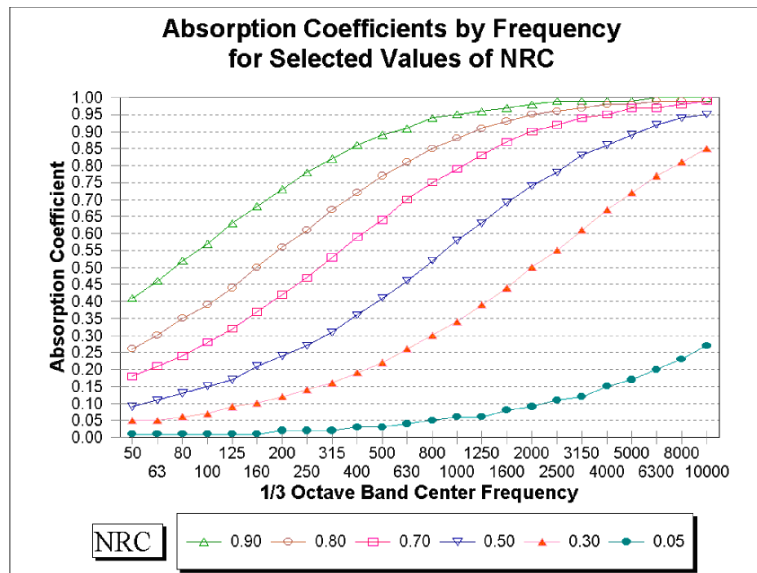

Noise Reduction Coefficient

$$NRC = \frac{\alpha_{250} + \alpha_{500} + \alpha_{1000} + \alpha_{2000}}{4}$$

...rounded to the nearest 0.05.



23

Sabins

$$a = \sum S_n \alpha_n$$

$$\bar{\alpha} = \frac{\sum S_n \alpha_n}{S_{total}}$$

Where:

S = surface area

α = absorption coefficient

a = absorption (sabins)

All rooms have surfaces.

All surfaces have α .

\therefore All rooms have sabins.



24



Alphabet Soup of Acoustics

Room Acoustics and Materials

- NRC: Noise Reduction Coefficient (of a material)
- RT: Reverberation Time
- GWB: Gypsum wallboard
- LVP: Luxury vinyl plank (flooring)

Sound Isolation and Noise Control

- NC: Noise Criteria
- dBA: A-weighted decibels
- TL: Transmission Loss
- STC: Sound Transmission Class
- NIC: Noise Isolation Class
- IIC: Impact Insulation Class
- NR: Noise Reduction



Effects of Absorption

$$RT = \frac{0.049V}{a}$$

- Time it takes an impulse to decay 60 dB
- V is volume in ft^3
- a is absorption in sabins
- Affects speech intelligibility and music
- Range: 0.2 to 6+ seconds

$$NR = 10 \log \frac{a_2}{a_1}$$

- Reduction in level, for a given source, by increasing a
- a_1 is absorption “before”
- a_2 is absorption “after”
- Range: 0 to 5 dB (usually)




Mechanical Systems Noise Control



Quiet Background Sound



Background Noise Goals

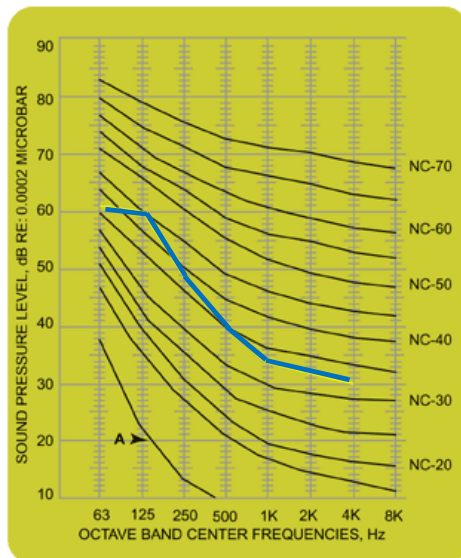

TYPICAL PROJECT NOISE GOALS

Pro Recording Studios:	Threshold
Concert Halls:	Threshold
Professional Theaters:	NC-15-20
High School Auditoria:	NC-20-25
High-end Board Rooms:	NC-25
Classrooms:	NC-30
Typical Offices:	NC-35-40
Lobbies:	NC-45



Background Sound – HVAC Systems

Noise Generators

High Airflow Velocities

Fan Noise

Vibrating Equipment

Noise Control Solutions

Large Ducts


Quiet Machines & Sound Attenuators

Vibration Isolation



Mechanical Systems: An Example

Equipment Location: Rooftop

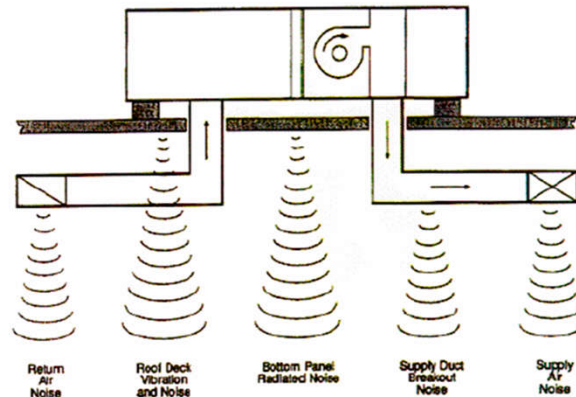


Transient Sound Level Criteria

From Design Guide 30, Table 4.2: Criteria for Transient Sounds

Room Usage	Transient to Background Noise Difference (NC points or dB)
Critical listening (music performance, sound editing, etc.) and confidential speech	-10
Teaching, learning, studying	-5 to 0
Sleeping, residential activity	-5 to 0
Office work, research	-5 to +5
Circulation, waiting, support function	+5 to +10



Privacy: S/N in Reverse

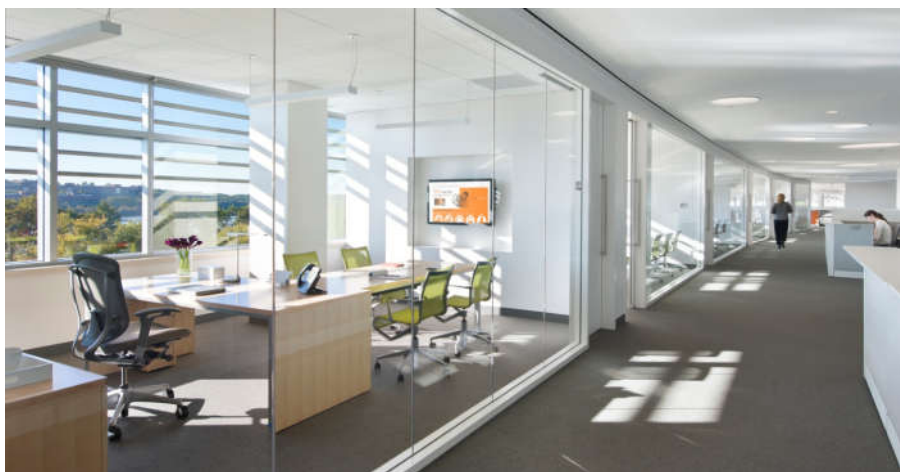

Dassault Systemes HQ: © Acentech



Source Levels (examples from Ch. 6)

Sound source	Sound Pressure Level (dBA)
Normal speech	56 dBA
Cocktail party	75 to 85 dBA
Music (<i>fortissimo</i>)	90 to 95 dBA
Diesel locomotive from 100 feet	90 dBA
Truck driving 55 mph, from 50 feet	80 dBA
Footsteps on an IIC 45 floor/ceiling	55 dBA in the room below
Chiller with rotary-screw compressor	90 dBA
Chiller with reciprocating compressor	97 to 103 dBA



33

Example criteria calculation

- Aircraft flyover produces
- 80 dB at 500 Hz, at
- New academic lab building

Table 4-3. Example Calculations of Sound Isolation Requirement (500 Hz)

	Classroom	Research Lab
Steady-state criterion from Table 4-1	30 dB	45 dB
Plus transient criterion from Table 4-2	-5 dB	+5 dB
Equals criterion for intruding sound level	25 dB	50 dB
Source level	80 dB	80 dB
Minus criterion for intruding sound level	25 dB	50 dB
Equals sound isolation requirement	55 dB	30 dB



34



Sound Isolation Codes and Standards (Ch 5)

Building Type	Reference
Offices	GSA <i>P-100</i> – NIC requirements
Multifamily housing	HUD: STC and IIC ICC Guideline: NNIC and NISR IBC and other codes: STC and IIC
Schools	ANSI S12.60: STC requirements
Healthcare	FGI Guidelines: STC requirements
Courts	GSA Courts Design Guide: NIC
“Green” Buildings	ASHRAE, IgCC, LEED, and others



Sound Isolation Metrics

Airborne Sound Isolation		Impact Sound Isolation	
Laboratory	Field	Laboratory	Field
STC	ASTC, NIC, NNIC	IIC	AIIC, ISR, NISR



Rating system - STC

- Transmission Loss varies with frequency
- Sound Transmission Class (STC) is a single-number rating (like NC, dBA)
 - Simple
 - Misses things (i.e. not good for low-freq music, diesel trucks, etc.)
- On a decibel scale. 0 to 80+
 - Δ of 1 = insignificant
 - Δ of 5 to 10 = significant



37

Sound Isolation


- Outdoor-to-outdoor
 - Highway barriers
 - Outdoor music venues
- Outdoor-to-indoor
 - Envelope construction
 - Curtainwall design
 - Fenestration
- Indoor-to-indoor



38




Sound Isolation: Space Planning

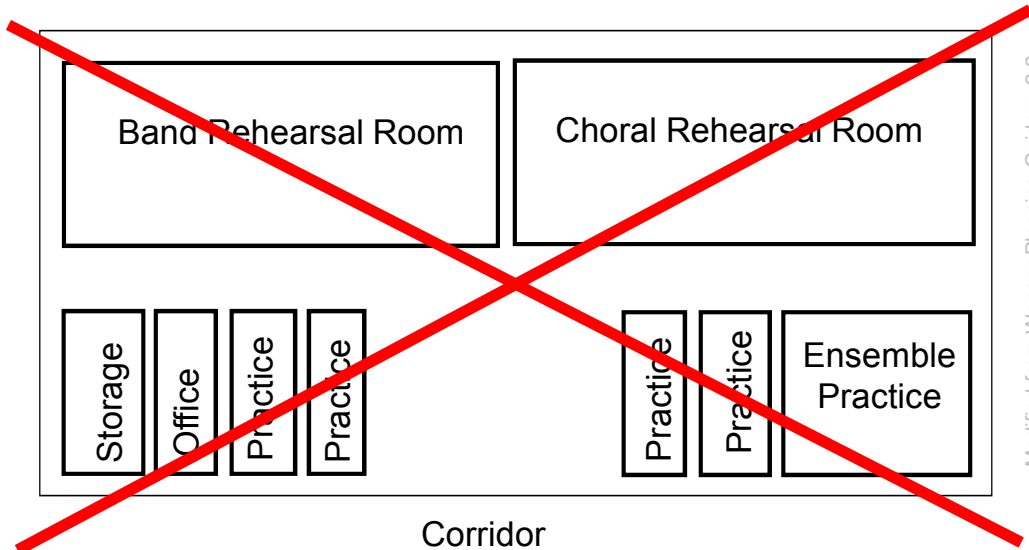

Modified from Wenger Planning Guide v. 2.2




Space Planning

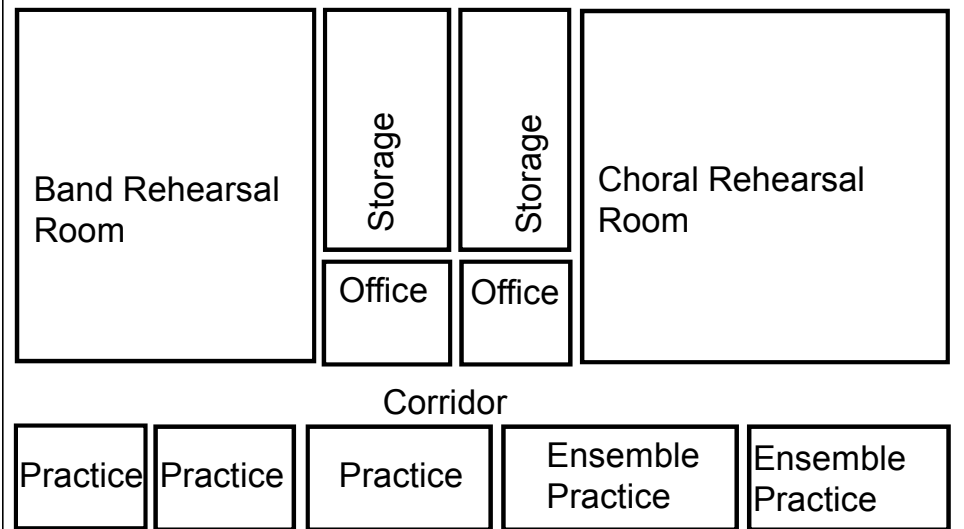

Modified from Wenger Planning Guide v. 2.2



Three tools

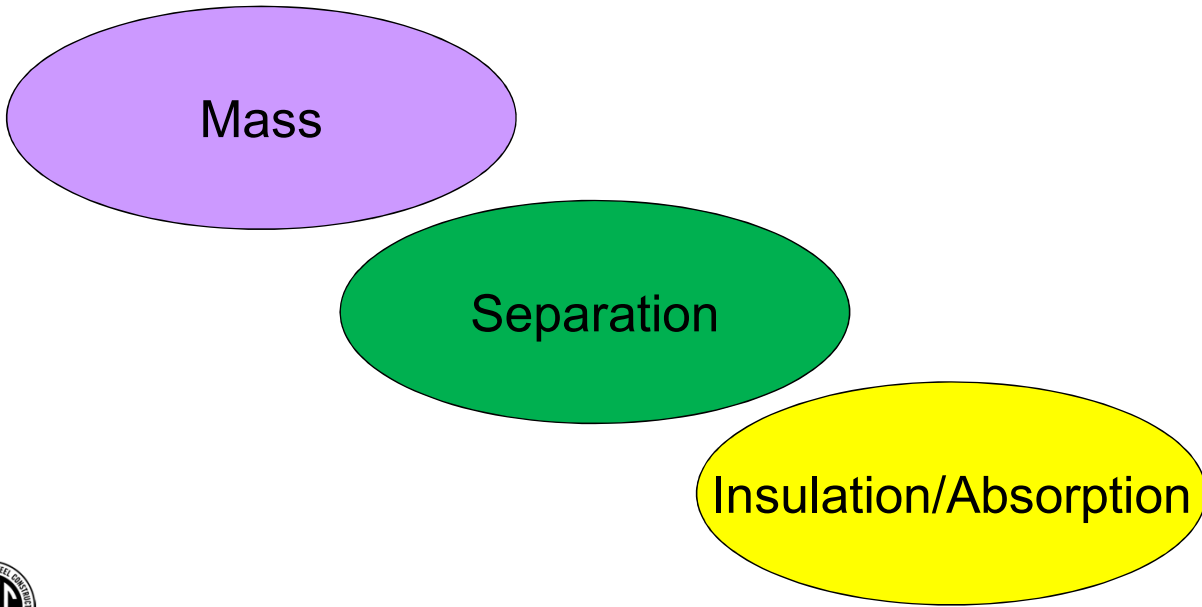

41

Mass law

- For a given frequency:
 - TL increases ~5 to 6 dB/doubling of mass
- For a given mass:
 - TL increases ~5 to 6 dB/octave
- Mass law ideal for *limp* monolithic homogeneous structures




42



Mass law

- TL is a low-frequency problem
- Varies with:

1. Internal stiffness
2. Internal resonance
3. Angle of incidence

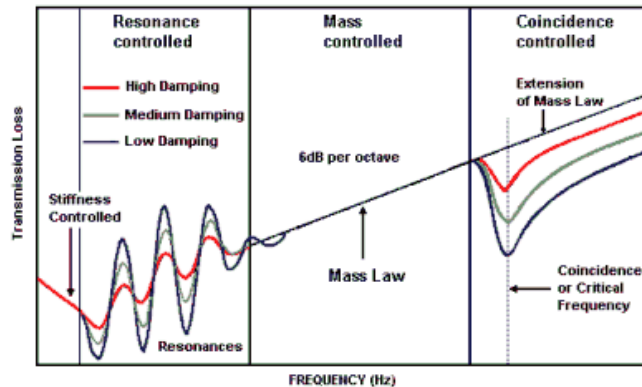

Separation

- Need to beat mass law
- Stop those molecules from bumping into each other
- De-couple mass layers
- Steel Buildings: **WHERE IT'S AT**




Absorption / Insulation

- Insulation inside the cavity
- Related to NR ($NR = 10 \log \frac{a_2}{a_1}$)
- Like a very small room – fill it with fuzz
- Eliminates reverberance/resonance inside the cavity, and
- Damps the movement of the skins




45

Sound Isolating Constructions

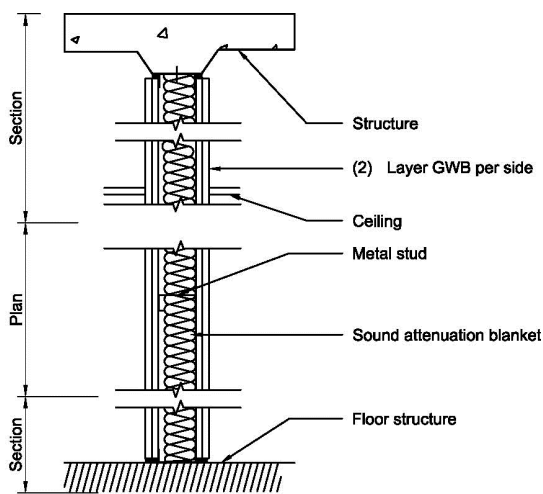

Provide a cont. bead of acoustical sealant around ceiling and floor perimeters of partition.

STC 52

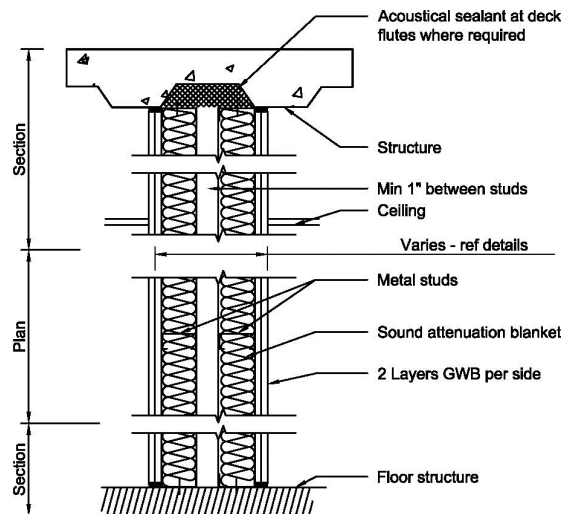


Provide a cont. bead of acoustical sealant around ceiling and floor perimeters of partition.

STC 64


46




Sound Isolation – Flanking Paths

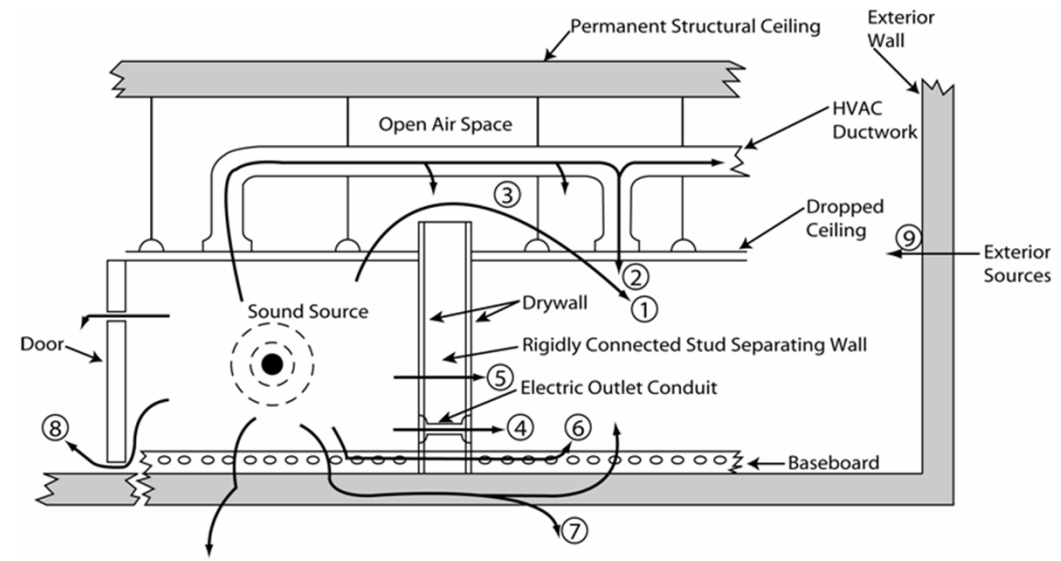


Eliminate gaps

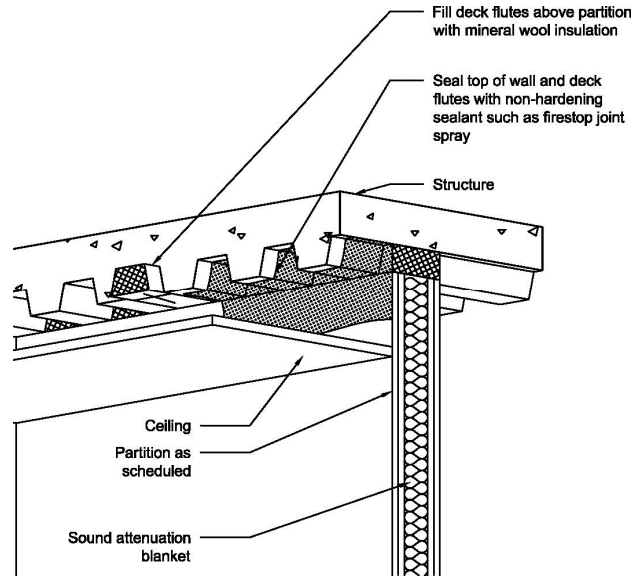

Floor/Ceiling Assemblies

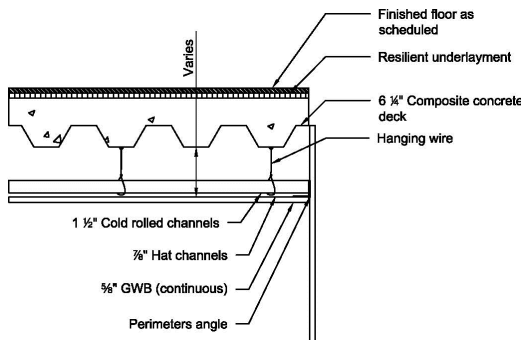

STC 60
IIC 50 to 60

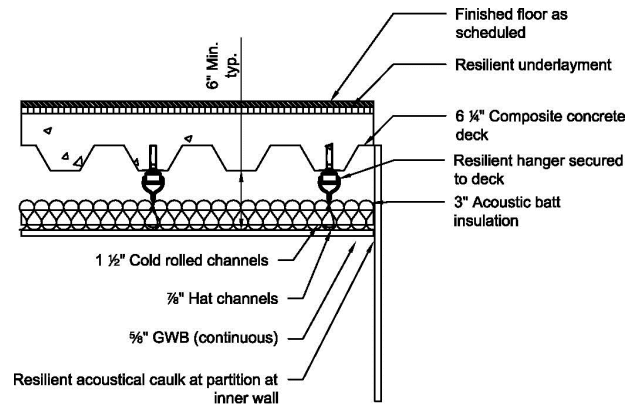

STC 64 to 69
IIC 60 to 65




Compare to concrete:

6" CIP Concrete Slab		8" CIP Concrete Slab	
STC 55	IIC 50 to 60	STC 58	IIC 50 to 65+


Concrete, no ceiling

- 8" P-T Slab
- No Ceiling
- LVP with integral impact sound isolation material (1mm to 2.5mm)
- N=8
- AII-C values from 51 to 54

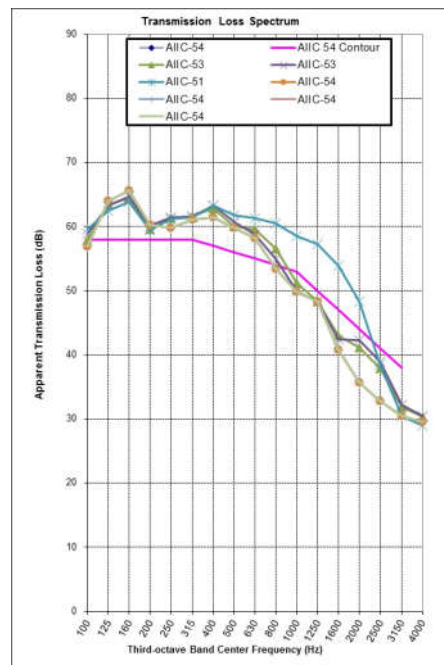

Concrete, with Ceiling; Same Floors



- 8" P-T Slab
- Wire-hung GWB ceiling, 3" batt
- LVP with integral impact sound isolation material (1mm to 2.5mm)
- N=8
- AII-C values from 54 to 57

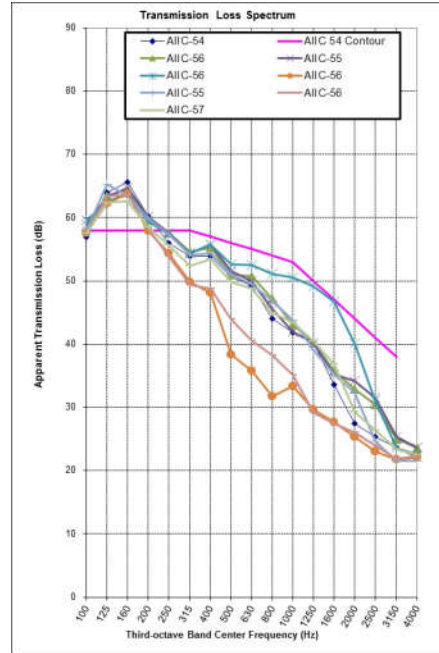

51



Concrete Comparison

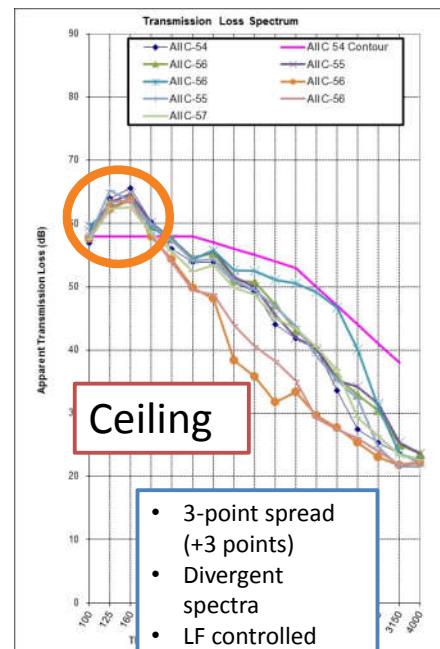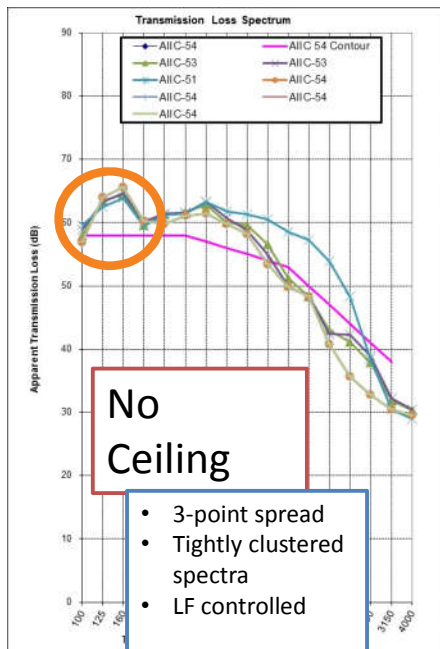


52





Steel

- 6-1/4" Total Slab Depth (TSD) Composite Slab
- LW Concrete on Metal Deck
- 1 layer GWB on resilient clips, batt insulation
- LVP with integral sound mat (1mm to 2.5mm)
- N=4
- AIIC-58

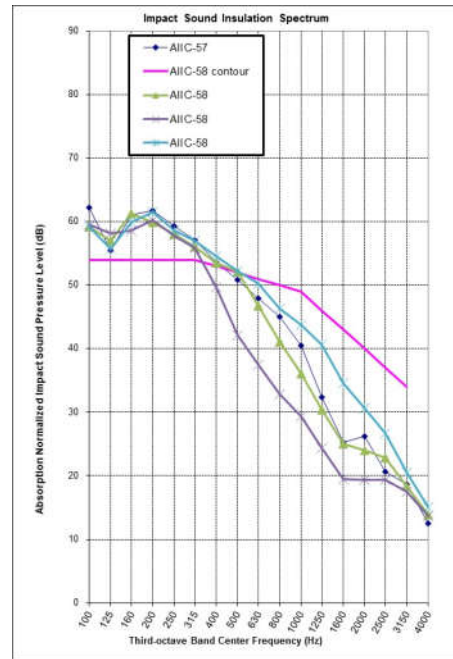

53



Concrete versus Steel

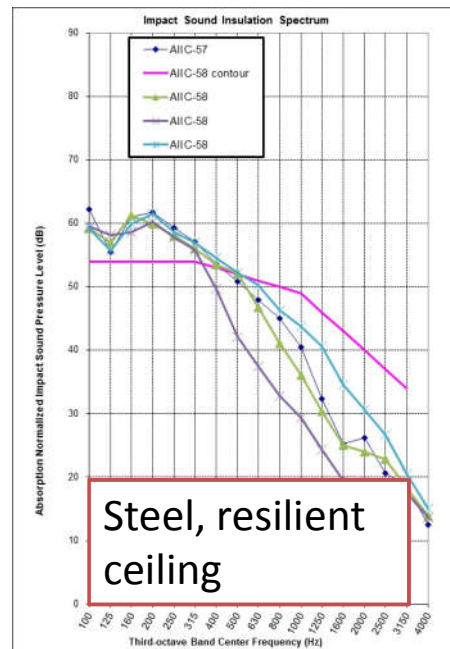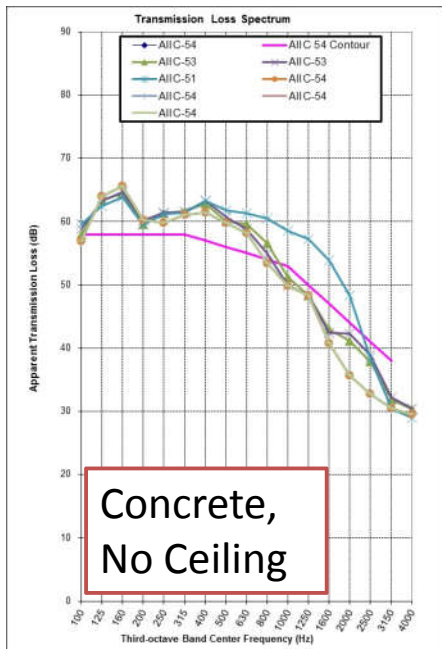

54




Concrete versus Steel

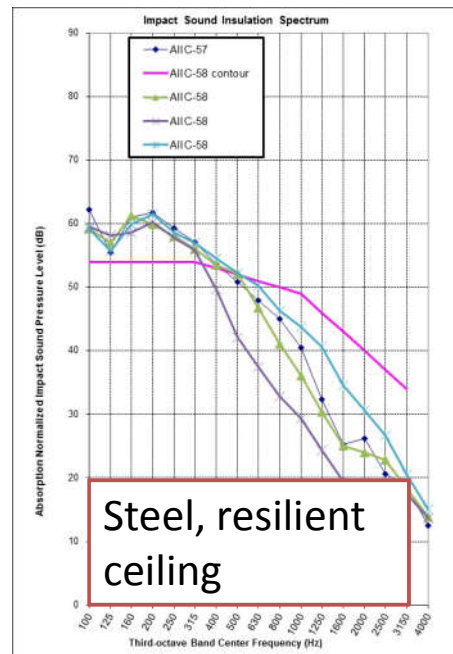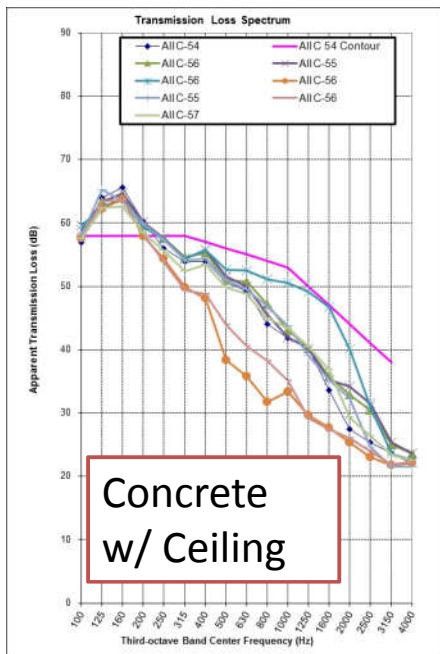

55

Wood – Open-Web Truss

- Wood floor nailed through fiberboard “underlayment” to subfloor
- 12” OW Truss
- 1 layer GWB on 2-legged “resilient channels”, compromised
- Batt insulation
- AII-C 38
- Subject of lawsuit

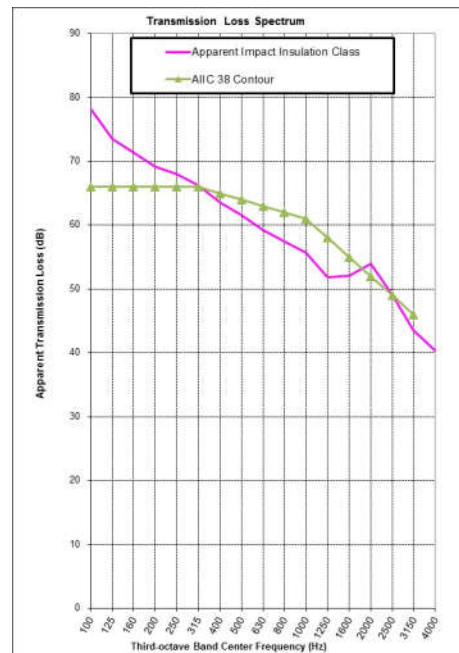


56





Wood – Open-Web Truss


- LVP on 1-1/2" Gypsum Concrete
- 1/4" resilient mat
- 18" open-web truss
- Batt insulation
- 1 layer GWB on resilient channels
- AII C 45 to 50 (n=9)
- (No lawsuits)

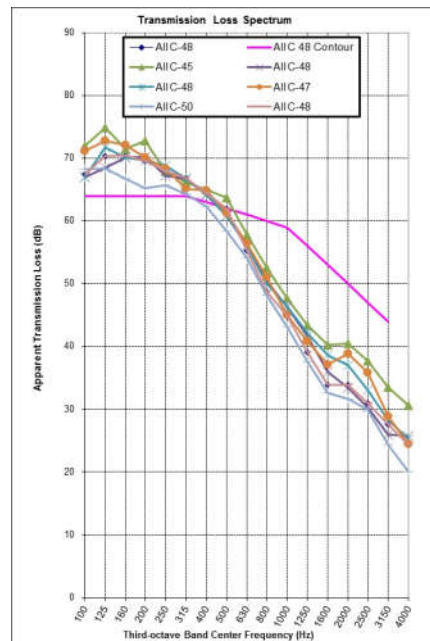


Steel vs Wood

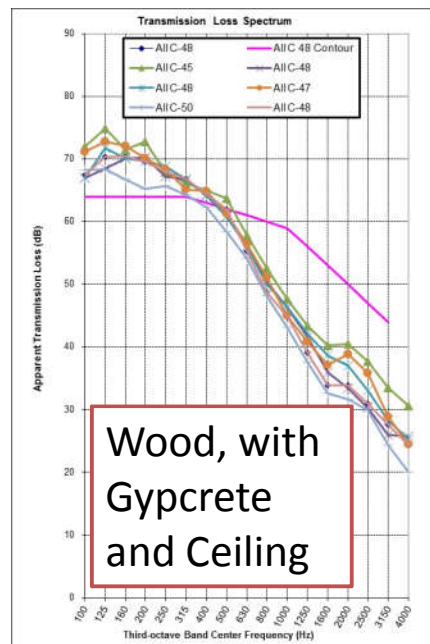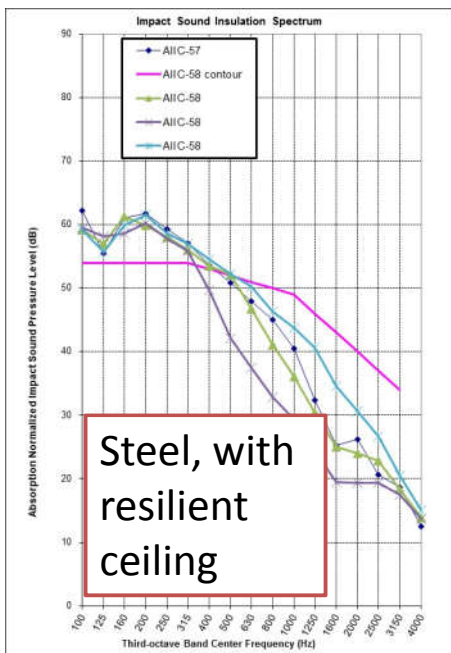

Floor/Ceiling Assemblies

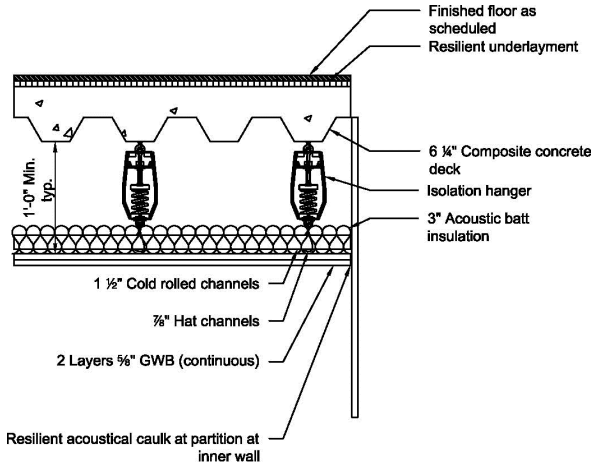

STC 70+
IIC 65 to 70

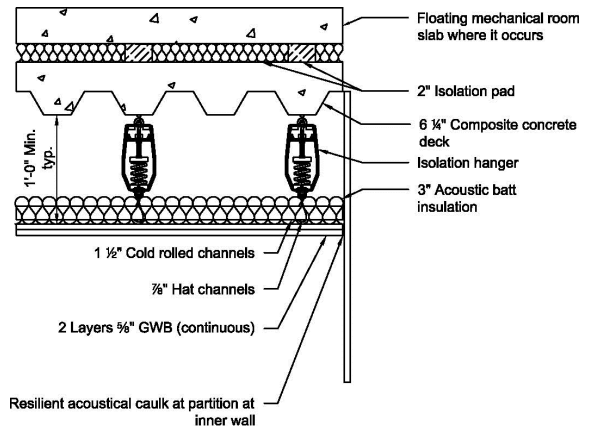

STC 75 to 80
IIC 70 to 75



Example: EMPAC



EMPAC: Springs for Floated Floors



61

EMPAC: Springs for Floated Floors



62



EMPAC: Springs for Floated Floors



63

AISC | Questions?



CEU / PDH Certificates

- You will receive an email on how to report attendance from:
registration@aisc.org.
- Be on the lookout: Check your spam filter! Check your junk folder!
- Completely fill out online form. Don't forget to check the boxes next to each attendee's name!



CEU / PDH Certificates

- Reporting site (URL will be provided in the forthcoming email).
- Username: Same as AISC website username.
- Password: Same as AISC website password.





AISC | Thank you.

