




**AISC**  
**Night School**

Thank you for joining our live webinar today.  
We will begin shortly. Please standby.


Thank you.  
Need Help?  
Call ReadyTalk Support: 800.843.9166




---

Today's audio will be broadcast through the internet.

Alternatively, to hear the audio through the phone, dial 888 224 7958.




There's always a solution in steel!




---

Today's live webinar will begin shortly.  
Please standby.  
As a reminder, all lines have been muted. Please type any questions or comments through the Chat feature on the left portion of your screen.

Today's audio will be broadcast through the internet.  
Alternatively, to hear the audio through the phone, dial 888 224 7958.



There's always a solution in steel!




---

AISC is a Registered Provider with The American Institute of Architects Continuing Education Systems (AIA/CES). Credit(s) earned on completion of this program will be reported to AIA/CES for AIA members. Certificates of Completion for both AIA members and non-AIA members are available upon request.

This program is registered with AIA/CES for continuing professional education. As such, it does not include content that may be deemed or construed to be an approval or endorsement by the AIA of any material of construction or any method or manner of handling, using, distributing, or dealing in any material or product.

Questions related to specific materials, methods, and services will be addressed at the conclusion of this presentation.



There's always a solution in steel!



## Copyright Materials

This presentation is protected by US and International Copyright laws. Reproduction, distribution, display and use of the presentation without written permission of AISC is prohibited.

© The American Institute of Steel Construction 2017

The information presented herein is based on recognized engineering principles and is for general information only. While it is believed to be accurate, this information should not be applied to any specific application without competent professional examination and verification by a licensed professional engineer. Anyone making use of this information assumes all liability arising from such use.



There's always a solution in steel!



## Course Description

### Session 5: Crane Girder Design and Frame Analysis March 6, 2017

Lesson 5 includes the design of a typical 30-foot-long crane runway girder and an analysis for a typical frame in the example building. A crane girder design procedure is demonstrated, including the evaluation of strength and serviceability limit states. Examples of proper details for minimizing fatigue effects for crane runway girders are presented. Development of the frame loads, including seismic loads, and the selection of the seismic force resisting system are discussed. Second order analysis methods and calculations for estimating second order effects are presented.



There's always a solution in steel!



## Learning Objectives

- List the steps in the procedure for the design of a crane runway girder.
- List the key aspects in crane runway girder details to minimize fatigue effects.
- Establish the seismic loads for the building frame design based on ASCE7-10 requirements.
- Discuss the general analysis requirements per AISC 360-10 for use of the Direct Analysis Methods for analysis of frames



There's always a solution in steel!



## Design of Industrial Buildings

### Session 5: Crane Girder Design and Frame Analysis March 6, 2017



Presented by  
Jules Van de Pas, SE, PE  
Vice President, Computerized Structural Design

There's always a solution in steel.



## AISC Night School 13

### Design of Industrial Buildings Lesson 5



Presenter:  
 Jules Van de Pas



There's always a solution in steel!

11

## Buildings with Overhead Cranes

### • Lesson 5

- 30 ft. Runway Beam Design
- Runway Details
- Wind load Calculations
- Snow Load Calculations
- Seismic Forces
- Load Combinations
- Frame Design using the Direct Analysis Method



There's always a solution in steel!

10

## Design of 30 ft Runway Girder

- Crane capacity = 50 tons (CMAA Class D)
- Bridge weight = 90.8 kips
- Trolley and hoist weight = 31.2 kips
- Wheel load = 78 kips
- Wheel spacing = 11.0 ft.
- Rail weight = 175 lbs./yard
- Vertical impact = 25% of wheel loads
- Lateral load = 20% of lifted load + trolley and hoist

$$\text{Lateral load} = .20(100 \text{ kips} + 31.2 \text{ kips})/4 = 6.6 \text{ kips/wheel}$$



There's always a solution in steel!

## Design of 30 ft Runway Girder

Use **ASD**

Deflection requirements: Locate wheel loads symmetrically placed about the girder centerline.  $a = 9.5 \text{ ft. (114 in.)}$

Vertical:  $L/800 = (30 \text{ ft.})(12)/800 = 0.45 \text{ in.}$

Horizontal:  $L/400 = (30 \text{ ft.})(12)/400 = 0.9 \text{ in.}$

$$I_{\text{req'd}}: \Delta_{\text{max}(x)} = \frac{P_a a}{24EI} (3L^2 - 4a^2) = \frac{(78 \text{ kips})(114 \text{ in.})}{(24)(29000)I} [3(360)^2 - 4(114 \text{ in.})^2]$$

$$= \frac{4300}{I} \quad I = \frac{4300}{0.45 \text{ in.}} = 9,560 \text{ in.}^4$$

Try W36x160,  $I_x = 9760 \text{ in.}^4$  Table 3-3



There's always a solution in steel!

12

## Design of 30 ft Runway Girder

$$P_{lat} = \frac{.20(100\text{kips} + 31.2\text{kips})}{4} = 6.6 \text{ kips}$$

$$\Delta_{max} = \frac{P_{lat}a}{24EI}(3L^2 - 4a^2)$$

$$\Delta_{max} = \frac{(6.6\text{kips})(114")}{(24)(29000)I}(3(360")^2 - 4(114")^2) = \frac{364}{I}$$

$$I = \frac{364}{\frac{L}{400}} = 404 \text{ in}^4 \quad \text{Try W36X231 } I_y/2 = 470 \text{ in}^4 \text{ Table 3-5}$$



There's always a solution in steel!

13

## Design of 30 ft Runway Girder

Calculate Moments:

$$DL \text{ (Girder + Rail + Clamps)} = 231 + 175/3 + 20 = 309 \text{ lbs/ft}$$

$$M_{xDL} = \frac{wL^2}{8} = \frac{(.309 \frac{\text{kips}}{\text{ft}})(30 \text{ ft})^2}{8} = 35 \text{ kip-ft}$$

$$M_{xLL} = \frac{P_a}{2L}(L - \frac{a}{2})^2 = \frac{78 \text{ kips}}{2(30 \text{ ft.})}(30 \text{ ft.} - \frac{11 \text{ ft.}}{2})^2 = 780 \text{ kip-ft}$$

$$M_x = 1.25(780 \text{ kip-ft.}) + 35 \text{ kip-ft} = 1010 \text{ kip-ft}$$

$$M_y = \frac{6.6 \text{ kips}}{78 \text{ kips}}(780 \text{ kip-ft}) = 66 \text{ kip-ft}$$



There's always a solution in steel!

14

## Design of 30 ft Runway Girder

Check bending with impact for the W36x231:

From Table 3-10:  $M_x = 1800 \text{ kip-ft.} > 1010 \text{ ok}$

From Table 3-4:  $M_y = 439 \text{ kip-ft}/2 = 220 > 66.0 \text{ kip-ft ok}$

Check biaxial bending:

$$M_{rx}/M_{cx} + M_{ry}/M_{cy} = 1010/1800 + 66/220 = 0.86 < 1.0 \text{ ok}$$

Use W36x231



There's always a solution in steel!

15

## Design of 30 ft Runway Girder

Check Shear- AISC Chapter G

$h/t_w = 42.2$  (Table 1-1),  $d = 36.5 \text{ in.}$ ,  $t_w = 0.76 \text{ in.}$

$$\frac{h}{t_w} = 42.2 \leq 2.24 \sqrt{\frac{E}{F_y}} = 54 \quad \text{(web slenderness limit for G2.1)}$$

Nominal shear strength,  $V_n = 0.6F_yA_wC_v$

$$\Omega_v = 1.5, C_v = 1.0, A_w = (36.5 \text{ in.})(0.76 \text{ in.}) = 27.7 \text{ in.}^2$$

$$V_n/\Omega = (0.6)(50 \text{ ksi})(27.7 \text{ in.}^2)(1.0)/1.5 = 554 \text{ kips}$$

$$V_a = W_{dl}(L/2) + P_a(2 - a/L)$$

$$V_a = (.309 \text{ kip/ft})(30 \text{ ft}/2) + (1.25 * 78 \text{ kips})(2 - 11 \text{ ft}/30 \text{ ft})$$

$$V_a = 164 \text{ kips} < 554 \text{ ok}$$



There's always a solution in steel!

16

## Design of 30 ft Runway Girder


Check Web Local Yielding- AISC J10.2

$$\Omega = 1.5$$

$$R_n / \Omega = F_{yw} t_w (5k + l_b) / 1.5 \quad J10-2$$

$$= (50 \text{ ksi})(0.76 \text{ in.})[(5)(2.21 \text{ in.}) + (12 \text{ in.})] / 1.5 = 584 \text{ kips}$$

$$97.5 \text{ kips} < 584 \text{ kips ok}$$

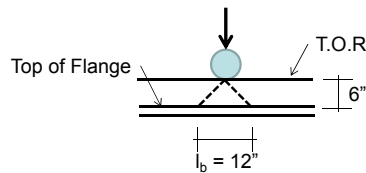

There's always a solution in steel!

17

## Design of 30 ft Runway Girder

Check Web Local Crippling- AISC J10.3

$$t_f = 1.26 \text{ in.}, t_w = 0.76 \text{ in.}, d = 36.5 \text{ in.}, l_b = 12 \text{ in.}, \Omega = 2.0$$

$$\frac{R_n}{\Omega} = \frac{0.8 t_w^2 \left[ 1 + 3 \left( \frac{l_b}{d} \right) \left( \frac{t_w}{t_f} \right)^{1.5} \right] \sqrt{\frac{E F_{yw} t_f}{t_w}}}{\Omega} \quad J10-4$$

$$= \frac{0.8 (0.76)^2 \left[ 1 + 3 \left( \frac{12}{36.5} \right) \left( \frac{0.76}{1.26} \right)^{1.5} \right] \sqrt{\frac{29000(50)(1.26)}{0.76}}}{2.0} = 524 \text{ kips} \geq 97.5 \text{ kips ok}$$



There's always a solution in steel!

18

## Design of 30 ft Runway Girder

Check Sidesway Web Buckling AISC J10.4(b)  
 compression flange not restrained against rotation

$$h/t_w = 42.2, b_f = 16.5 \text{ in.}, L_b = 360 \text{ in.}$$

$$(h/t_w) / (L_b/b_f) = 42.2 / (360/16.5) = 1.93 > 1.7$$


Sidesway web buckling limit state does not apply



There's always a solution in steel!

19

## Design of 30 ft Runway Girder



There's always a solution in steel!

20

## Design of 30 ft Runway Girder

Check if Bearing Stiffeners are Required (at column):  
 Check using AISC Section J10.2(b) for an end condition.  
 Use 3/4 in. cap plate on the column.

$$R_n = F_{yw}t_w(2.5k + l_b) \quad (J10-2)$$

$$k = 2.21 \text{ in.} \quad l_b = 2(0.75) + t_{col}$$

$$l_b = 2(0.75) + 0.86 = 2.36 \text{ in.}$$

$$R_n = (50)(0.76)[(2.5)(2.21) + 2.36] = 300 \text{ kips}$$

$$R_n/\Omega = 300/1.5 = 199 > 164 \text{ kips ok}$$



There's always a solution in steel!

21

## Design of 30 ft Runway Girder

Check Local Web Crippling AISC J10-5a

$$l_b/d = 2.36 \text{ in.}/36.5 \text{ in.} = 0.07 < 0.2$$

$$\frac{R_n}{\Omega} = \frac{.4tw^2 \left[ 1 + \left( \frac{l_b}{d} \right) \left( \frac{t_w}{t_f} \right)^{1.5} \right] \sqrt{\frac{EF_{yw}t_f}{t_w}}}{\Omega}$$

$$\frac{R_n}{\Omega} = \frac{.4(.76)^2 \left[ 1 + \left( \frac{2.36}{36.5} \right) \left( \frac{.76}{1.26} \right)^{1.5} \right] \sqrt{\frac{29000(50)1.26}{.76}}}{1.5}$$

$$\frac{R_n}{\Omega} = 213 \text{ kips} \geq 164 \text{ kips}$$



There's always a solution in steel!

22

## Design of 30 ft Runway Girder

Even though the calculations indicate that bearing stiffeners are not required, the author's opinion is that they should be provided. This is because if the rail is not precisely centered over the web, or if other eccentricities exist, the web may buckle due to combined bending and axial load.



There's always a solution in steel!

23

## Buildings with Overhead Cranes

- **Lesson 5**
  - 30 ft. Runway Beam Design
  - Runway Details
  - Wind load Calculations
  - Snow Load Calculations
  - Seismic Forces
  - Load Combinations
  - Frame Design using the Direct Analysis Method



There's always a solution in steel!

24


## Tie Back Failure



There's always a solution in steel!

25


## Tie Backs

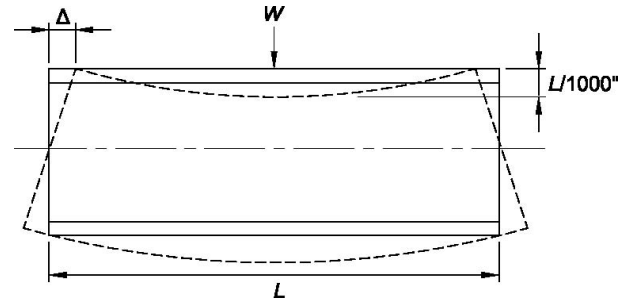

There's always a solution in steel!

26


## Tie Backs

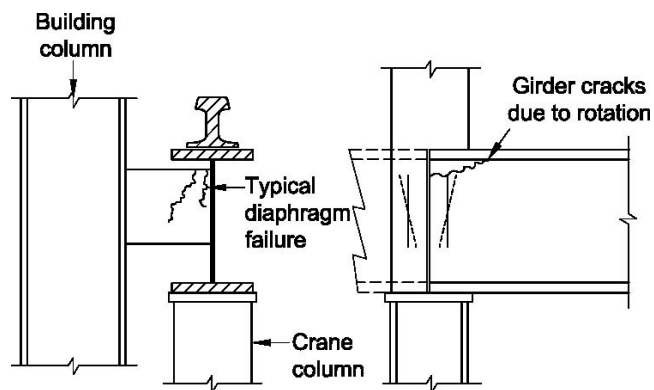

There's always a solution in steel!

27


## Tie Backs

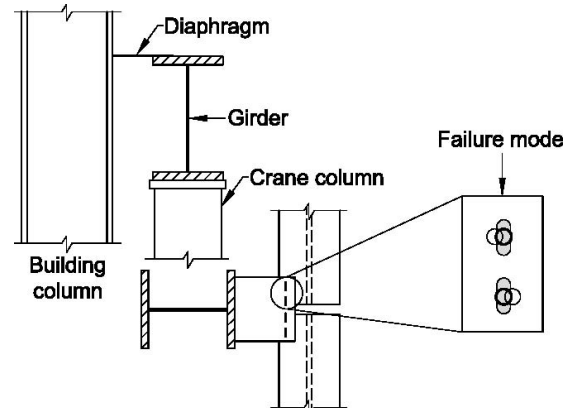

There's always a solution in steel!

28


## Tie Back Design

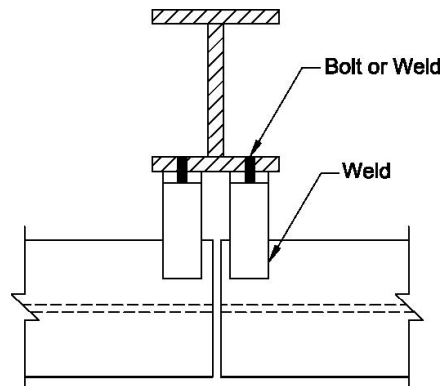

There's always a solution in steel!

29

## Tie Back Design

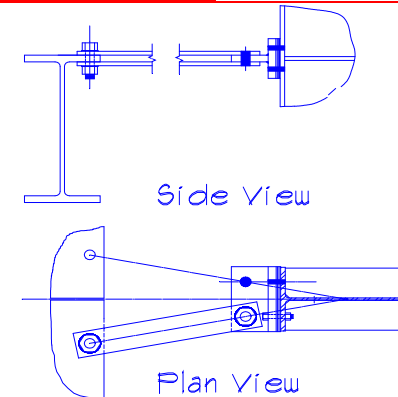


There's always a solution in steel!

30

## Bearing Stiffeners

- Extend the full height of the girder
- Weld to the girder top flange with full penetration welds
- Weld to the girder web and bottom flange with properly sized continuous fillet welds.




There's always a solution in steel!

31

## Cap Channel and Cap Plates

- Use girder cap channels only if this saves 30 #/ft. over a wide flange member
- Avoid girder cap plates for AISC Mill Buildings Class A (500,000 cycles and above)

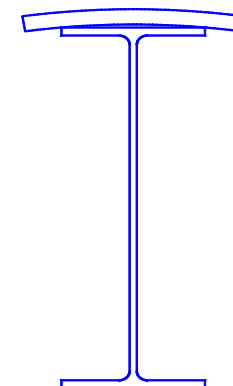


There's always a solution in steel!

32

## Welded Plate Girders

- AIST Requirements

- AWS Chapter 9 required
- Top flange to web weld, full penetration with fillet backing
- Bottom flange to web weld, continuous fillet welds
- Flange and web splices, full penetration welds ground smooth in the direction of stress
- Nondestructive testing of all welds is required



There's always a solution in steel!

33

## Laced Crane Girders


- Horizontal truss attached to the top flange of the girder and a back up girder to form a truss to stabilize the top flange of the girder
  - usually economical for spans over 40 feet
  - use bolted connections
  - account for differential deflection of the girder and back up girder
- AIST requires *bottom* flange bracing for spans over 36 feet in class A, B, and C buildings and spans over 40 feet in class D buildings.



There's always a solution in steel!

34

## Crane Girder Lacing

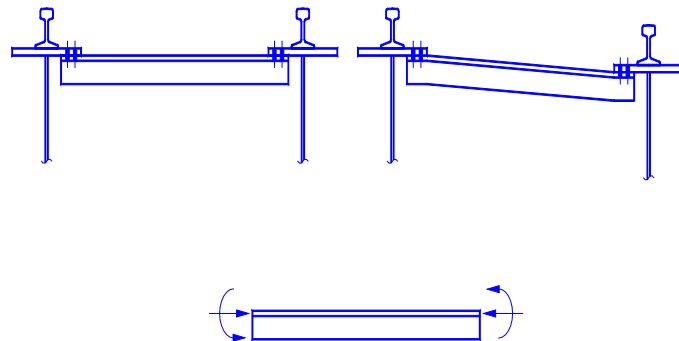


There's always a solution in steel!

35

## Crane Column Cap Plates

- Allow girder end rotation
  - avoid thick cap plates
  - place the bolts outside of the column flanges.
- Transfer longitudinal forces down the runway aisle
- Allow for adjustment in placing the crane girder.
  - use slip critical bolts in oversize holes or bolts with short slots perpendicular to the girder.



There's always a solution in steel!

36

## Rail Attachments

- The rail to girder attachments must perform the following functions:
  - transfer the lateral loads from the top of the rail to the top of the girder
  - allow the rail to float longitudinally relative to the top flange of the girder
  - hold the rail in place laterally
  - allow for lateral adjustment or alignment of the rail



There's always a solution in steel!

37

## Methods of rail Attachment

- The commonly accepted methods of rail attachment are:
  - hook bolts
  - rail clips
  - rail clamps
  - patented rail clips




There's always a solution in steel!

38

## Miscellaneous Attachments

- Coordinate attachments to the crane girder with other trades
- AISC prohibits welding attachments to the bottom flange




There's always a solution in steel!

39

## Bolted Rail Joints

CRANE RAILS  
Bolted butt joint

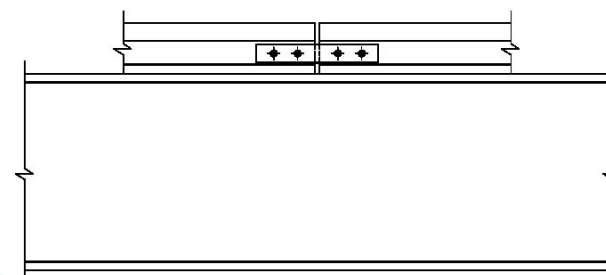

There's always a solution in steel!

40

## Welded Butt Joints


- Consult rail manufacturer for welding requirements and details.
- Once welded these joints are usually maintenance free.
- Impact stresses eliminated with welded joints.



There's always a solution in steel!

41

## Diaphragm Plate Failure

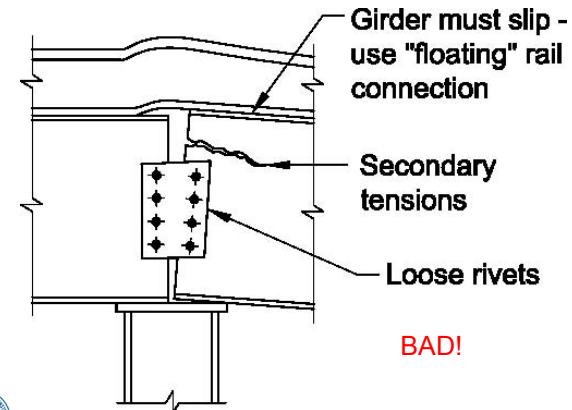

There's always a solution in steel!

42

## Buildings with Overhead Cranes


- **Lesson 5**
  - 30 ft Runway Beam Design
  - Runway Details
  - Wind load Calculations
  - Snow Load Calculations
  - Seismic Forces
  - Load Combinations
  - Frame Design using the Direct Analysis Method



There's always a solution in steel!

43


## Building Footprint

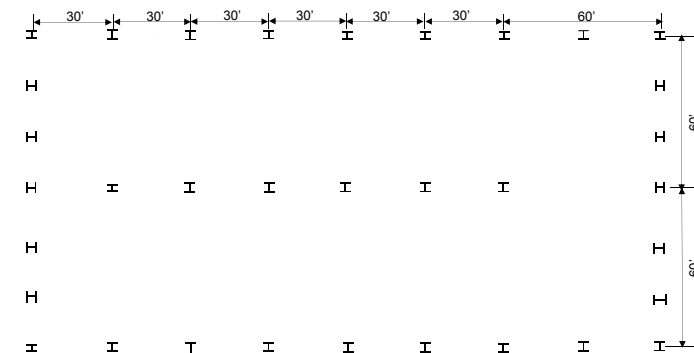

There's always a solution in steel!

44

## Cross Section

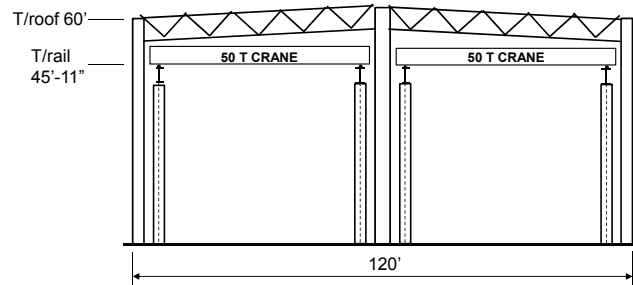

There's always a solution in steel!

45

## Codes and Standards

- Building Code: IBC 2015
- Minimum Design Loads For Buildings And Other Structures (ASCE 7-10)
- Building Department Contact: John Smith
- Date: July 6, 2016
- Local Ordinances: None



There's always a solution in steel!

46

## Loads

- ROOF DEAD LOAD
  - Roofing (SSR) 2.0 psf
  - Insulation 1.0 psf
  - Roof Bracing 1.0 psf
  - Joists 3.0 psf
  - Joist Girders 3.0 psf
  - Columns 6.0 psf
  - MEP Allowance 3.0 psf
  - **Total 19.0 psf**
- WALL DEAD LOAD **3.0 psf**  
 (Includes Girts)



There's always a solution in steel!

47

## Load Calculations - Wind

- Wind Loads
- Wind Speed: 115 mph
- Wind Exposure: C
  - Using ASCE 7-10 (Directional Procedure)
  - Chapter 27 ASCE 7-10
  - Use Spreadsheet!
- Use ATC website to get wind speed.

<http://windspeed.atcouncil.org/>



There's always a solution in steel!

48

## Load Calculations - Wind

### MWFRS WIND LOAD CALCULATIONS (ASCE 7-10)

Project: ABC Building Job No.: SJIWASC  
By: JMF Date: 4/30/16

$q_z = 0.00256K_z K_{zt} K_d V^2$  (Eq. 27.3-1)  
 Occ. = II risk category, Table 1.5-1  
 V = 115 basic wind speed (3-second gust), mph, Figure 26.5-1A  
 Exp. = C exposure category, Section 26.7  
 K<sub>d</sub> = 0.85 wind directionality factor, Section 26.6 & Table 26.6-1  
 K<sub>zt</sub> = 1 topographic factor, Section 26.8 & Figure 26.8-1  
 Encl. = E enclosure classification, Section 26.10  
 R<sub>w</sub> = 1 large volume buildings reduction factor, Section 26.11.1.1  
 G = 0.85 gust factor, Section 26.9  
 z<sub>g</sub> = 900 atmospheric boundary layer, ft., Table 26.9-1  
 α = 9.5 3-sec gust speed power law exponent, Table 26.9-1

Pressure Coefficients per  
Table 26.11-1 & 27.4-1

Height	K <sub>z</sub>	q <sub>z</sub>	Wind Pressures, psf							
			WW WL	LW WL	Total WL	Side WL	Roof WL			Internal WL
0-15	0.85	24.43	16.6	10.4	27.0	-14.5	-18.7	-10.4	-6.2	4.4
20	0.90	25.95	17.6	11.0	28.7	-15.4	-19.9	-11.0	-6.6	4.7
30	0.98	28.27	19.2	12.0	31.2	-16.8	-21.6	-12.0	-7.2	5.1
40	1.04	30.03	20.4	12.8	33.2	-17.9	-23.0	-12.8	-7.7	5.4
50	1.09	31.48	21.4	13.4	34.8	-18.7	-24.1	-13.4	-8.0	5.7
60	1.14	32.71	22.2	13.9	36.1	-19.5	-25.0	-13.9	-8.3	5.9



There's always a solution in steel!

49

## Load Calculations - Wind

- Wind Loads
  - Using ASCE 7-10 (Directionality Procedure)
  - Use Spreadsheet!

### Wind Loads For A Specific Height, h (Used for Components & Cladding)

Height	K <sub>z</sub>	q	WW	LW	Total	Side	Roof WL		Int.	
			WL	WL	WL	WL	0 to h	h to 2h		> 2h
0-15	0.85	24.43	16.6	10.4	27.0	-14.5	-18.7	-10.4	-6.2	4.4
60	1.14	32.71	22.2	13.9	36.1	-19.5	-25.0	-13.9	-8.3	5.9

- For a typical frame:
  - 16.6 psf ≤ Windward Wall Pressure ≤ 22.2 psf
  - Wind at eave/frame = (36.1 psf)(30 ft)(60/2 ft) = 32.5 kips
  - For ASD Factored wind = (0.6)(32.5 kips) = 19.5 kips



There's always a solution in steel!

50

## Loads

- ROOF LIVE LOADS
  - 20.0 psf (reducible)
- SNOW LOADS
  - Ground Snow Load ( $P_g$ ): 15.0 psf
  - Building Category: II → Importance Factor,  $I_s = 1.0$
  - Thermal Factor,  $C_t$ : 1.0
  - Exposure Factor,  $C_e$ , Partially Exposed: 1.0



There's always a solution in steel!

51

## Load Calculations - Snow

- Low Slope Roof Snow Load (slope < 15°):
  - $P_f = 0.7C_e C_t I_p P_g = 10.5$  psf
- Minimum Roof Snow for Low Slope Roof
  - $P_m = I_s P_g = 15$  psf ← controls
- Check Rain-on-Snow Surcharge, slope 1/4" per ft.
  - (Slope = 1.19°) < (W / 50 = 60 / 50 = 1.2) Add Surcharge
  - $P_f = 15$  psf + 5 psf = 20 psf
- Must consider unbalanced snow per 7.6 if slope is 1/2" per ft. or greater.



There's always a solution in steel!

52

## Buildings with Overhead Cranes

- **Lesson 5**
  - 30 ft Runway Beam Design
  - Runway Details
  - Wind load Calculations
  - Snow Load Calculations
  - Seismic Forces
  - Load Combinations
  - OMF Design using the Direct Analysis Method



There's always a solution in steel!

53

## Local Code Requirements

- Ground Snow Load: 15 psf
  - Seismic Spectral Acceleration:
    - $S_s = 1.054 g$
    - $S_1 = .40 g$
- (Determine from USGS Website)  
<http://earthquake.usgs.gov/designmaps/us/application.php>



There's always a solution in steel!

54

## Loads

- SEISMIC LOADS
  - Spectral Acceleration,  $S_s$ : 1.054 G
  - Spectral Acceleration,  $S_1$ : 0.400 G
  - Occupancy Category: II
  - Site Class: D
    - Average Soil shear wave velocity,  $\bar{v}_s$  800 ft/sec
    - Average Standard penetration resistance,  $\bar{N}$  15 blows
    - Average Soil undrained shear strength,  $\bar{s}_u$  1500 psf
  - Importance Factor, I: 1.0
  - Seismic Design Category: TBD



There's always a solution in steel!

55

## Load Calculations - Seismic

Determine Seismic Design Category

- Adjusted MCE Spectral Response Acceleration

$$S_{MS} = F_a S_s = (1.1)(1.054) = 1.16g$$

$$S_{M1} = F_v S_1 = (1.6)(0.400) = 0.640g$$

- Design Spectral Acceleration

$$S_{DS} = \frac{2}{3} S_{MS} = \frac{2}{3} (1.16) = 0.77g$$

$$S_{D1} = \frac{2}{3} S_{M1} = \frac{2}{3} (0.64) = 0.43g$$



There's always a solution in steel!

56

## Load Calculations - Seismic

Determine SDC (Cont.)

Since  $S_I < 0.75$ ,

Use Tables 11.6-1 and 11.6-2

From Table 11.6-1: Seismic Design Cat. = D

From Table 11.6-2: Seismic Design Cat. = D

Seismic Design Category = D



There's always a solution in steel!

57

## Load Calculations - Seismic

Impact of Seismic Design Category D

ASCE 7-10 Chapter 12 Seismic Design Requirements for Building Structures

- Cannot use  $R=3.0$  + AISC 360 (table 12.2-1)

Transverse Direction: OMF?

- Not permitted in SDC D except single story buildings up to 65 ft. tall with roof dead load of less than 20 psf ...

Longitudinal Direction: OCBF?

- Not permitted in SDC D except single story buildings up to 60 ft. tall with roof dead load of less than 20 psf ...



There's always a solution in steel!

58

## Load Calculations - Seismic

Including the mass of the crane in the dead load results in dead load exceeding the Chapter 12 limits for the use of OMF and OCBF systems per Chapter 12.

- Consider Structure as a "Nonbuilding Structure Similar to Buildings" per Chapter 15 of ASCE 7-10
- Refer to ASCE 7-10 Chapter 11 definitions and Chapter 15 for "Nonbuilding Structure Similar to Buildings"



There's always a solution in steel!

59

## Load Calculations - Seismic

- Transverse Direction from Table 15.4-1

OMF – Ordinary Moment Frame

With permitted height increase

$R = 2.5$

$\Omega_0 = 2$

$C_d = 2.5$

Height limit of 100 feet.

Detailing Requirements per AISC 341



There's always a solution in steel!

60

## Load Calculations - Seismic

- Longitudinal Direction from Table 15.4-1  
 OCBF – Ordinary Concentrically Braced Frame  
 With permitted height increase  
 $R = 2.5$   
 $\Omega_0 = 2$   
 $C_d = 2.5$   
 Height limit of 160 ft.  
 Detailing Requirements per AISC 341



There's always a solution in steel!

61

## Load Calculations - Seismic

- See ASCE 7-10 Chapter 15 15.4.4
- Calculate the Elastic Fundamental Period  
 – From 1<sup>st</sup> Order Frame Analysis (Crane Lateral)

$$\omega = \sqrt{\frac{k}{m}} = \sqrt{\frac{21.6 \text{ kips}/2.00 \text{ in.} \left( \frac{386 \text{ in.}}{\text{sec}^2} \right)}{255 \text{ kips}}} = \frac{4.04 \text{ rads}}{\text{sec}}$$

$$T = \frac{2\pi}{\omega} = \left( \frac{2\pi \text{ rads}}{\text{cycle}} \right) \left( \frac{\text{sec}}{4.04 \text{ rads}} \right) = 1.55 \text{ sec/cycle}$$



There's always a solution in steel!

62

## Load Calculations - Seismic

- Limit the calculated period to the product of the “coefficient for upper limit on calculated period” and the approximate fundamental period (ASCE 7-10 12.8.2)

$$T_a = C_t h_n^x = (0.028)(60)^{0.8} = 0.74 \text{ sec/cycle}$$

$$T \leq C_u T_a = 1.4(0.74) = 1.04 \text{ sec} \quad (\text{Limit})$$



There's always a solution in steel!

63

## Load Calculations - Seismic

- Equivalent Lateral Force Procedure

$$V = C_s W$$

where

$$C_s = \frac{S_{DS}}{R/I_e} \leq \frac{S_{D1}}{T(R/I_e)} \geq .044 S_{DS} * I_e$$



There's always a solution in steel!

64

## Load Calculations - Seismic

- Determine the seismic coefficient  $C_s$

$$\frac{S_{DS}}{R/I_e} = \frac{0.77}{2.5/1.0} = 0.31$$

- using  $T_a$  from ASCE-7

$$\frac{S_{D1}}{T(R/I_e)} = \frac{0.427}{0.74(2.5/1.0)} = 0.23$$

- using  $1.4 T_a$

$$\frac{S_{D1}}{T(R/I_e)} = \frac{.427}{1.04(2.5/1.0)} = 0.16 \quad C_s = .16 \text{ transverse direction}$$

>29%



There's always a solution in steel!

65

## Lateral Frame Loads

- Crane Thrust = 21.6 kips
- Wind at Eave = 19.5 kips
- Seismic Strength Check
  - Seismic at Roof:  $0.7\rho Q_E = 10.9$  kips
  - Seismic at TOR:  $0.7\rho Q_E = \underline{22.3}$  kips  
32.4 kips
- Seismic Drift Evaluation and P-Delta Limit per ASCE\*
  - Seismic at Roof:  $Q_E = (1.04/1.55)(1/.7)10.9 = 10.4$  kips
  - Seismic at TOR:  $Q_E = (1.04/1.55)(1/.7)22.3 = 21.4$  kips
- \*Strength level adjusted without the limit on the period



There's always a solution in steel!

66

## Vertical Frame Loads

- Roof Dead Load =  $(13)(30)/1000 = 0.39$  kips/ft
- Roof Live or Snow =  $(20)(30)/1000 = 0.60$  kips/ft
- Wind Uplift (windward, W)
  - $= (25.0 + 5.9)(30)/1000 = 0.927$  kips/ft
- Wind Uplift (leeward)
  - $= (8.5 + 5.9)(30)/1000 = 0.36$  kips/ft
- Maximum Roof Downward Seismic Load
  - $= [1.0 + (0.14)S_{DS}]D = [1.0 + (0.14)(0.77)](0.39)$
  - $= 0.43$  kips/ft.
- Minimum Roof Upward Seismic Load
  - $= [.60 - (0.14)S_{DS}]D = [.60 - (0.14)(0.77)](0.39)$
  - $= 0.19$  kips/ft.



There's always a solution in steel!

67

## Buildings with Overhead Cranes

- Lesson 5**
  - 30 ft. Runway Beam Design**
  - Runway Details**
  - Wind load Calculations**
  - Snow Load Calculations**
  - Seismic Forces**
  - Load Combinations**
  - Frame Design using the Direct Analysis Method



There's always a solution in steel!

68

## Load Combinations - ASD

- 1) D
- 2) D + L
- 3) D + S
- 4) D + 0.75L + 0.75S
- 5) 5) D + 0.6W
- 5a) D + 0.7E
- 6a) D + 0.75L + 0.75(0.6W) + 0.75(S)
- 6b) D + 0.75L + 0.75(0.7E) + 0.75(S)
- 7) 0.6D + 0.6W
- 8) 0.6D + 0.7E



There's always a solution in steel!

69

## Load Combinations - Seismic

Substituting  $E = \rho Q_E$  and including  $(0.14S_{DS})D$ :

- 1) D
- 2) D + L
- 3) D + S
- 4) D + 0.75L + 0.75S
- 5) D + 0.6W
- 5a)  $(1.0 + 0.14S_{DS})D + 0.7\rho Q_E$
- 6) D + 0.75L + 0.45W + 0.75S
- 6a)  $(1.0 + 0.14S_{DS})D + 0.75L + 0.525\rho Q_E + 0.75S$
- 7) 0.6D + 0.6W
- 8)  $(0.6 - 0.14S_{DS})D + 0.7\rho Q_E$



There's always a solution in steel!

70

## Load Combinations - Cranes

- The following designations are used for the crane loads. This is the same nomenclature as used by AISE in Technical Report No. 13:

- $C_{VS}$  – Vertical loads due to a single crane in one aisle only.
- $C_{SS}$  – Side thrust due to a single crane in one aisle only.
- $C_d$  – Dead load of cranes.



There's always a solution in steel!

71

## Load Combinations - Cranes

- 1) D +  $C_d$
- 2) D +  $C_d$  +  $C_{VS}$  +  $C_{SS}$
- 3) D +  $C_d$  + S
- 4) D +  $C_d$  + 0.75( $C_{VS}$  +  $C_{SS}$ ) + 0.75 S
- 5) D +  $C_d$  + 0.6W
- 5a)  $(1.11)(D + C_d) + 0.7\rho Q_E$
- 6) D +  $C_d$  + 0.75W + 0.75L + 0.75 S
- 6a)  $(1.11)(D + C_d) + 0.525\rho Q_E + 0.75C_{VS} + 0.75 S$
- 7) 0.6(D) + 0.6W
- 8)  $(0.49)(D + C_d) + 0.7\rho Q_E$

By observation, combinations 5a and/or 6a will control the design of the frame. Use combination 5a for the analysis / example.



There's always a solution in steel!

72

## Load Combinations - Seismic

---

Load Cases Including the Overstrength Factor (ASD):

5b)  $(1.11)(D + C_d) + 0.7\Omega_o Q_E$

6b)  $(1.11)(D + C_d) + 0.5\Omega_o Q_E + 0.75L + 0.75(L_r \text{ or } S \text{ or } R)$

8b)  $(0.6 - 0.14S_{DS})D + 0.7\Omega_o Q_E$

Load Case For Story Drift Determination

5c)  $(1.35)(D + C_d) + Q_E^* + 2S$

$\theta$  limit per 12.8.7 (ASCE 7-10)  $D + Q_E^* + S$

\*Strength Level, adjusted for actual T,  $\rho = 1.0$



There's always a solution in steel!

73

## Buildings with Overhead Cranes

---

- Lesson 5

- 30 ft Runway Beam Design
- Runway Details
- Wind load Calculations
- Snow Load Calculations
- Seismic Forces
- Load Combinations
- Frame Design using the Direct Analysis Method




There's always a solution in steel!

74

## Analysis of the Frame

---

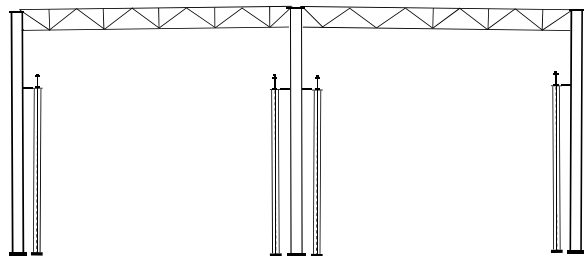

There's always a solution in steel!

75

## Analysis of the Frame

---

First a review of the AISC Specification requirements for analysis and design.



There's always a solution in steel!

76

## AISC Specification General Stability Requirements

### Chapter C DESIGN FOR STABILITY

- Use any method of *analysis and design* that considers:
  1. Member deformations (flexural, axial, shear)
  2. P- $\Delta$  effects and P- $\delta$  effects
  3. Geometric imperfections
  4. Stiffness Reduction due to inelasticity
  5. Uncertainty in stiffness and strength



There's always a solution in steel!

77

## 2010 Analysis for Stability

- Three prescriptive analysis and design approaches are provided in the Specification:
  - Section C1.1: Direct Analysis Method of Design
  - Section C1.2: Alternative Methods of Design
    - Effective Length Method (Appendix 7)
    - First-Order Analysis Method (Appendix 7)



There's always a solution in steel!

78

## Analysis and Design Methods

- All 3 methods involve a direct or indirect 2<sup>nd</sup> order analysis.
- All 3 methods require addition of “notional” loads.
- If  $\frac{\Delta_{2nd-order}}{\Delta_{1st-order}} > 1.5$ , only “direct analysis” is permitted.



There's always a solution in steel!

79

## Analysis and Design Methods

- First-Order Method is usually conservative
  - Assumes  $B_2 = 1.5$
- Effective Length Method
  - Uses nominal stiffness in model
  - Requires stability analysis to calc. K factors unless  $B_2 \leq 1.1$
- Direct Analysis Method
  - Uses reduced stiffness in model
  - $K=1$  (no further stability analysis required)



There's always a solution in steel!

80

## Direct Analysis Method

- Chapter C in 2010 *Specification*
  - Applicable to all types of structures
  - 2<sup>nd</sup> Order Analysis uses Reduced Stiffness
  - Applicable to All Structural Systems
    - Braced frames
    - Moment frames
    - Shear wall systems
    - Any combination of systems



There's always a solution in steel!

81

## Notional Loads

- *Notional loads*,  $N_i$ , are fictitious lateral loads, where

$$N_i = 0.002Y_i$$

$Y_i$  = the total gravity load on story  $i$


The notional loads account for an initial out-of-plumbness at the maximum of 1/500 as defined in the AISC COSP. If a lesser out-of-plumbness can be justified,  $N_i$  can be reduced.



There's always a solution in steel!

82

## Direct Analysis Method

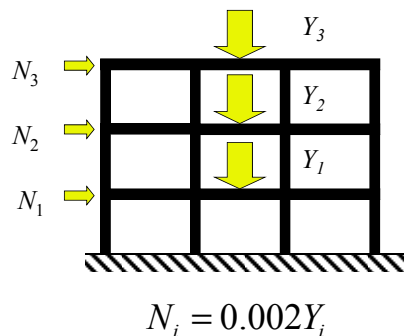

There's always a solution in steel!

83

## Direct Analysis Method

- If the second-order effects are limited,

$$\frac{\Delta_{2nd-order}}{\Delta_{1st-order}} \leq 1.5$$

notional loads are only required for the gravity-only load combinations.

Note:

- For most buildings, this will be the case.



There's always a solution in steel!

84

## Direct Analysis Method

---

- If  $\frac{\Delta_{2nd-order}}{\Delta_{1st-order}} > 1.5$

the notional loads are added to the other lateral loads in the load combinations.

- Apply notional loads in the direction of sway!



There's always a solution in steel!

85

## Notional Loads -Example

---

- Summation of the notional loads:

Where 276 kips is the summation of the vertical service loads in Combination 1 (D including  $C_d$ ).

$C_d=99\text{kips/aisle}$   $D=78$  kips

$$\sum N_i = 0.002 \sum Y_i = 0.002(276 \text{ kips}) = 0.55 \text{ kips}$$



There's always a solution in steel!

86

## Direct Analysis Method

---

- Use a reduced flexural and axial stiffness

$$EI^* = 0.8\tau_b EI$$

$$EA^* = 0.8EA$$

to account for influence of inelasticity on second-order effects (stiffness loss).



There's always a solution in steel!

87

## Direct Analysis Method

---

- $\tau_b$  accounts for loss of flexural stiffness under high compression loads ( $\alpha P_r > 0.5P_y$ ).
- For Mid-Rise and Low-Rise structures,  $\tau_b$  will usually be 1.0.

Rather than using  $\tau_b < 1$ , an additional notional load equal to  $0.001Y_i$  can be conservatively added to **all** load combinations. (Section C2.3(3))



There's always a solution in steel!

88

## Direct Analysis Method

- Inelastic flexural response due to axial force
  - Depends on the level of axial stress in the member

$$\text{when } \alpha P_r \leq 0.5 P_y; \quad \tau_b = 1.0$$

$$\text{when } \alpha P_r > 0.5 P_y; \quad \tau_b = 4 \left[ \frac{\alpha P_r}{P_y} \left( 1 - \frac{\alpha P_r}{P_y} \right) \right]$$

$$\alpha = 1.0 \text{ (LRFD)} \quad \alpha = 1.6 \text{ (ASD)}$$



There's always a solution in steel!

89

## Direct Analysis Method


- For LRFD
  - Conduct analysis using LRFD combinations
- For ASD
  - Conduct analysis using 1.6 \* ASD combinations
  - Divide final forces and moments by 1.6 (Accounts for nonlinearity of 2<sup>nd</sup> order analysis)



There's always a solution in steel!

90

## Actual Frame

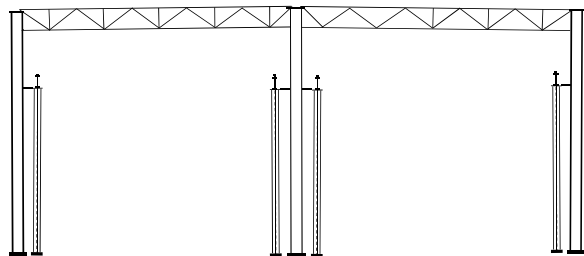

There's always a solution in steel!

91

## Model Details

- Model Joist Girder or Truss as a beam element at centerline of the truss
  - JG moment of inertia from SJI DG #11
  - Or estimate from the truss preliminary design
  - $\Sigma Ad^2$  of the chords (\*.85)
- Include the crane columns
  - Necessary for 2<sup>nd</sup> order analysis
  - Leaners increase 2<sup>nd</sup> order effects



There's always a solution in steel!

92

## Reference




There's always a solution in steel!

93

## Frame Model

The Model

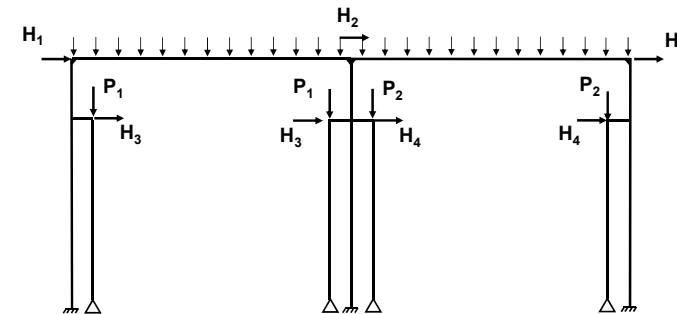

There's always a solution in steel!

94

## Direct Analysis Method

- Design process
  - Establish desired serviceability drift index.
  - Perform a preliminary design to determine member sizes.
  - Perform a first-order analysis to check drift index.
  - Estimate the ratio of second-order to first-order effects.
  - Adjust design as necessary to get reasonable drifts and 2<sup>nd</sup>-order magnifiers.
  - Perform second-order analysis
    - Use reduced stiffness,  $EI^*$  and  $EA^*$
    - Apply notional loads,  $N_i = 0.002Y_i$ , to the required load combinations
    - Conduct analysis using load combinations, not load cases, because second-order analysis is a non-linear problem.
    - If ASD, multiply forces by 1.6 before analysis
  - Determine forces and moments.
    - If ASD, divide forces by 1.6 after analysis



There's always a solution in steel!

95

## Estimate 2<sup>nd</sup> Order Effects

- Use AISC App. 8 "APPROXIMATE SECOND ORDER ANALYSIS" Eq. A-8-6 to estimate 2<sup>nd</sup> order effects to:
  - Identify acceptable analysis methods
  - Get a handle on magnitude of 2<sup>nd</sup> order effects
  - Identify stability problems before 2<sup>nd</sup> order computer analysis

$$\frac{\Delta_{2nd}}{\Delta_{1st}} \approx B_2 = \frac{1}{1 - \frac{\alpha \sum P_{nt}}{\sum P_{e2}}}$$



There's always a solution in steel!

96

## Estimate 2<sup>nd</sup> Order Effects

Calculate  $\sum P_{e2}$  from AISC Eq. A-8-7

- From 1<sup>st</sup>-order crane lateral analysis:  
 $\sum H = 21.6 \text{ kips}$   $\Delta_H = 2.0 \text{ in.}/0.8 = 2.5 \text{ in.}$
- For a moment frame  
 $R_M = 0.85$  (conservative)
- Elastic buckling load from Eq. C2-6b

$$\sum P_{e2} = R_M \frac{\sum HL}{\Delta_H} = 0.85 \frac{(21.6)(551)}{2.5} = 4,050 \text{ kips}$$

(lateral load, at crane ht.  $\Delta$  at crane ht. =551")



There's always a solution in steel!

97

## Estimate 2<sup>nd</sup> Order Effects

- Summation of Supported Gravity Load  
 – Different for each load combination!

$$\alpha \sum P_{nt} = 1.6(255) = 409 \text{ kips}$$

- 2<sup>nd</sup> Order P- $\Delta$  multiplier from Eq. C2-3

$$B_2 = \frac{1}{1 - \frac{\alpha \sum P_{nt}}{\sum P_{e2}}} = \frac{1}{1 - \frac{409}{4,050}} = 1.11$$



There's always a solution in steel!

98

## Estimate 2<sup>nd</sup>-Order Effects

- Small Effects  
 $1.0 \leq B_2 \leq 1.1$   
 – Any prescriptive method OK, K=1
- Moderate Effects  
 $1.1 < B_2 \leq 1.5$   
 – Any method OK, K>1 for Effective Length
- Large Effects  
 $B_2 > 1.5$

– Must use Direct Analysis, K=1



There's always a solution in steel!

99

## Perform 2<sup>nd</sup>-Order Analysis!

Structural Instability Detected!

Joint 14 Degree of Freedom MX



There's always a solution in steel!

100

## 2<sup>nd</sup> Order Model Instability

- Possible Causes
  - Gross Errors / Modeling Errors
    - Units
    - Modulus of Elasticity
  - Local Instabilities
    - Buckling of individual members
    - Buckling of groups of members
  - Overall Instability
    - $B_2 \gg 1.5$  (usually due to leaners)



There's always a solution in steel!

101

## Identifying 2<sup>nd</sup> Order Errors


- Check 1<sup>st</sup> Order Results First!
  - Are reactions and deflections reasonable?
  - (Cannot use unit stiffnesses or loads)
- Manually calculate  $B_2$ 
  - If  $B_2$  is large, sideway instability is possible
  - If  $B_2$  is small, sideway instability is not likely
- Perform Elastic Buckling Analysis
  - Review Buckled Shape and Load Ratio



There's always a solution in steel!

102


## Element Instability

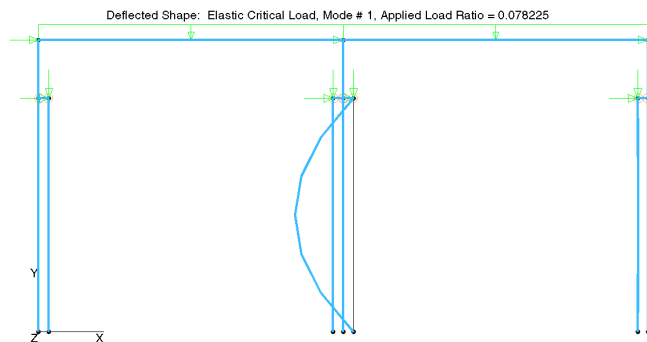

There's always a solution in steel!

103

## Sideway Instability

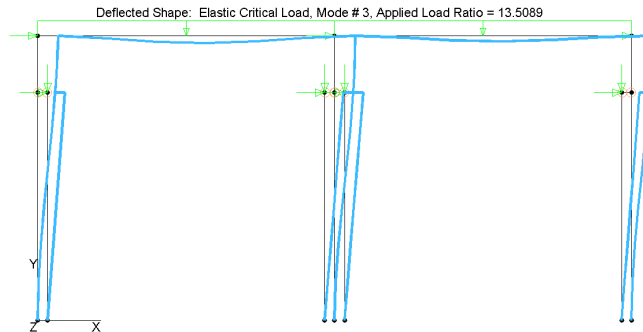

There's always a solution in steel!

104

## Analysis Input


- From Lesson 4 start with W24x84 exterior columns and W 24x146 interior columns.
- After some iteration select W30x99 exterior columns and W 24x146 interior columns.



There's always a solution in steel!

105

## Analysis Results - ASD

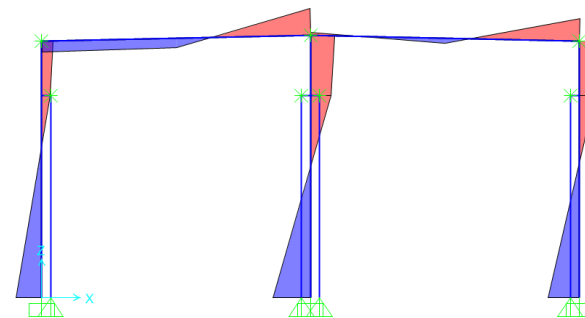

There's always a solution in steel!

106

## Analysis Results – ASD (5a)

		<u>1<sup>st</sup> Order</u>	<u>2<sup>nd</sup> Order</u>	<u>2<sup>nd</sup>/1<sup>st</sup></u>
Ext. Cols.				
	$P_a$	16.8 kips	16.9 kips	1.01
Top	$M_a$	251 kip-ft.	256 kip-ft.	1.02
Base	$M_a$	350 kip-ft.	359 kip-ft.	1.03
Int. Cols:				
	$P_a$	29.2 kips	29.3 kips	1.00
Top	$M_a$	268 kip-ft.	275 kip-ft.	1.03
Base	$M_a$	419 kip-ft.	430 kip-ft.	1.03
Sidesway:		3.15 in.	3.23 in.	1.03



There's always a solution in steel!

107

## Reference: Seismic Analysis

AISC Engineering Journal/Third Quarter 2011

Design of Steel Buildings for Earthquake and Stability by Application of ASCE 7 and AISC 360.

By: Shankar Nair, James O. Malley, and John D. Hooper



There's always a solution in steel!

108

## Buildings with Overhead Cranes

---

- **Lesson 5**
  - 30 ft. Runway Beam Design
  - Runway Details
  - Wind load Calculations
  - Snow Load Calculations
  - Seismic Forces
  - Load Combinations
  - Frame Design using the Direct Analysis Method



There's always a solution in steel!

109

## End of Lesson 5

---



There's always a solution in steel!

## Individual Webinar Registrants

---

PDH Certificates  
Within 2 business days...

- You will receive an email on how to report attendance from: [registration@aisc.org](mailto:registration@aisc.org).
- Be on the lookout: Check your spam filter! Check your junk folder!
- Completely fill out online form. Don't forget to check the boxes next to each attendee's name!



There's always a solution in steel!

## Individual Webinar Registrants

---

PDH Certificates  
Within 2 business days...

- New reporting site (URL will be provided in the forthcoming email).
- Username: Same as AISC website username.
- Password: Same as AISC website password.



There's always a solution in steel!

## 8-Session Registrants

---

### PDH Certificates

One certificate will be issued at the conclusion of all 8 sessions.



There's always a solution in steel!

## 8-Session Registrants

---

### QUIZZES

Access to the quiz: Information for accessing the quiz will be emailed to you by Wednesday. It will contain a link to access the quiz. EMAIL COMES FROM NIGHTSCHOOL@AISC.ORG

Quiz and Attendance records: Posted Tuesday mornings. [www.aisc.org/nightschool](http://www.aisc.org/nightschool) - scroll down to Quiz and Attendance Records.

Reasons for quiz:

EEU – must take all quizzes and final to receive EEU

PDHS – If you watch a recorded session you must take quiz for PDHS.

REINFORCEMENT – Reinforce what you learned tonight. Get more out of the course.

NOTE: If you attend the live presentation, you do not have to take the quizzes to receive PDHS.



There's always a solution in steel!

## 8-Session Registrants

---

### RECORDINGS

Access to the recording: Information for accessing the recording will be emailed to you by this Wednesday. The recording will be available for two weeks. For 8-session registrants only. EMAIL COMES FROM NIGHTSCHOOL@AISC.ORG.

PDHS – If you watch a recorded session you must take AND PASS the quiz for PDHS.



There's always a solution in steel!

## Night School Resources for 8-session package Registrants

---

Find all your handouts, quizzes and quiz scores, recording access, and attendance information all in one place!



There's always a solution in steel!

# Night School Resources for 8-session package Registrants

Go to [www.aisc.org](http://www.aisc.org) and sign in.

The screenshot shows the top navigation bar with links for EDUCATION, PUBLICATIONS, NASCC: THE STEEL CONFERENCE, SAFETY, STEEL SOLUTIONS CENTER, AWARDS AND COMPETITIONS, and RESEARCH LIBRARY. Below the navigation bar is a large banner image of a steel structure with the AISC logo. Underneath the banner is a 'Login' section with a form for 'USERNAME' and 'PASSWORD', a 'Remember Me' checkbox, and a 'REGISTER NOW' button for new users.

# Night School Resources for 8-session package Registrants

The screenshot shows the 'MyAISC' user profile page. On the left is a sidebar menu with options: Edit Profile, My Downloads, My Pending Quizzes, My Events, Order History, Course History, and Night School Resources (circled in red). The main content area includes sections for 'MY PROFILE' (with an 'EDIT PROFILE' button), 'MY PURCHASED DOWNLOADS', 'MY ORDER HISTORY' (with a 'VIEW ORDERS' button), and 'MY NIGHT SCHOOL RESOURCES' (with a 'VIEW RESOURCES' button circled in red). The 'MY NIGHT SCHOOL RESOURCES' section contains text about online resources for Night School courses.

# Night School Resources for 8-session package Registrants

The screenshot shows the 'Night School Resources' page. It features the same navigation bar and banner as the previous page. Below the banner is a breadcrumb trail: AISC > MYAISC > NIGHT SCHOOL RESOURCES. The main heading is 'Night School Resources'. Below this is a table with two columns: 'Event' and 'Date'. One row is visible: 'NS13.8-Session Package' on '1/30/2017 7:00:00 PM'. At the bottom left is the AISC logo and the slogan 'There's always a solution in steel!'.

# Night School Resources for 8-session package Registrants

The screenshot shows the 'Night School 13: Design of Industrial Buildings' resources page. It includes the navigation bar and banner. Below the banner is a breadcrumb trail: AISC > MYAISC > NIGHT SCHOOL RESOURCES > NS13.8-SESSION PACKAGE RESOURCES. The main heading is 'Night School 13: Design of Industrial Buildings'. Below this is the section '8-SESSION PACKAGE RESOURCES' which contains a table of resources.

Event	Date	Handouts	Video	Quiz	Attendance
NS13 - Design Criteria	1/30/2017 7:00:00 PM	<a href="#">Handouts</a>	<a href="#">Video</a>	Passcode: NS13DCN Ptest Score: 80	Pending
NS13 - Economic Considerations	2/6/2017 7:00:00 PM	<a href="#">Handouts</a>	Available 02/08/2017 5pm EST	Available 02/08/2017 5pm EST	Pending
NS13 - Lateral Load Systems and Details	2/13/2017 7:00:00 PM	<a href="#">Handouts</a>	Available 02/15/2017 5pm EST	Available 02/15/2017 5pm EST	Pending
NS13 - Preliminary Design Procedures	2/27/2017 7:00:00 PM	<a href="#">Handouts</a>	Available 03/01/2017 5pm EST	Available 03/01/2017 5pm EST	Pending
NS13 - Crane Girder Design and Frame Analysis	3/6/2017 7:00:00 PM	<a href="#">Handouts</a>	Available 03/08/2017 5pm EST	Available 03/08/2017 5pm EST	Pending
NS13 - Frame Member and Connection Design	3/13/2017 7:00:00 PM	<a href="#">Handouts</a>	Available 03/15/2017 5pm EST	Available 03/15/2017 5pm EST	Pending
NS13 - Transfer Crane Girder & Longitudinal Bridge Bracing Design	3/27/2017 7:00:00 PM	<a href="#">Handouts</a>	Available 03/29/2017 5pm EST	Available 03/29/2017 5pm EST	Pending
NS13 - Building Envelope and Bracing Design	4/3/2017 7:00:00 PM	<a href="#">Handouts</a>	Available 04/05/2017 5pm EST	Available 04/05/2017 5pm EST	Pending
NS13 - Final Exam	4/10/2017 7:00:00 PM			Available 04/12/2017 5pm EST	

## Night School Resources for 8-session package Registrants

- Weekly “quiz and recording” email.
- Weekly updates of the master Quiz and Attendance record found at [www.aisc.org/nightschool](http://www.aisc.org/nightschool). Scroll down to Quiz and Attendance records.
  - Updated on Tuesday mornings.



There's always a solution in steel!

## Night School Resources for 8-session package Registrants

- Webinar connection information:
  - Found in your registration confirmation/receipt.
  - Reminder email sent out Monday mornings.
- Link to handouts also found here.



There's always a solution in steel!

## Thank You

Please give us your feedback!  
*Survey at conclusion of webinar.*

There's always a solution in steel.

